


LIGHTSPEED

48-Hour Shipping On Select SKU's

QUICKSHIP

5 Day Shipping On Made To Order Product



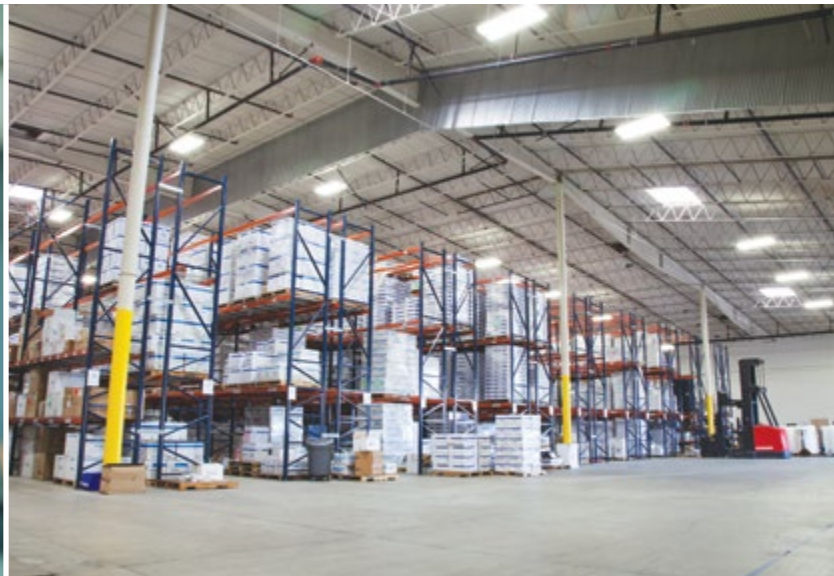

LIGHTSPEED

48-Hour Shipping On Select SKU'S

QUICKSHIP

5 Day Shipping On Made To Order Product



PROGRAM DETAILS

LIGHTSPEED

48-Hour Shipping On Select SKU's

QUICKSHIP

5 Day Shipping On Made To Order Product

NO SURCHARGE

FREIGHT TERMS

Freight will be prepaid and allowed by Intense Lighting on any order totaling \$2,000 or more within the limits of the continental United States

DOMESTIC ORDERS ONLY

TERMS & CONDITIONS

- LIGHTSPEED and QUICKSHIP items are limited to SKU's within program
- Maximum order quantity of 100 units per SKU
- Consult factory for orders over 100 units
- Products must be entered on a separate QS purchase order to ship within LIGHTSPEED or QUICKSHIP lead times
- Orders containing both LIGHTSPEED and QUICKSHIP items will ship in 5 days
- Products on mixed PO will ship within longest lead time SKU on order
- Order entry typos or errors will disqualify PO from QuickShip program lead times
- Normal shipping terms & conditions apply

LIGHT**SPEED**

48-Hour Shipping On Select SKU'S

QUICK**SHIP**

5 Day Shipping On Made To Order Product

LD 4" Downlighting for Commercial Spaces



Ultra Thin
Flange



Wide
Flood



Wet
Location

Built with simplicity in mind, the LD downlight offers great illumination in up to 1500lm with 2 Step MacAdam binning for excellent color consistency. The LD Non-IC Flat Frame takes up less than 4-inches of plenum space and provides infield adjustment for ceilings up to 1.5-inches thick. LD 4-inch downlight trims provide comfortable wide distribution illumination, 90 CRI and an ultra thin flange.

- Fire Rated, LC housing option
- Ultra thin trims
- Standard 0-10V dimming down to 1%
- Shallow housing for easy integration into tight plenum spaces

>> LIGHTSPEED



4" LD Non-IC Flat Frame

Example: LD4NCL1D101

CATALOG NUMBER	DESCRIPTION
LD4NCL1D101	12W / 1000 lm / 0-10V Dimming 1% / 120V
LD4NCL2D101	16W / 1500 lm / 0-10V Dimming 1% / 120V



4" LC Fire Rated J-Box Housing

Example: LC4L3

CATALOG NUMBER	DESCRIPTION
LC4L3	10W / 850 Lumen Downlight / 120V-277V 0-10V, 120V Phase
LC4L4	12W / 1000 Lumen Downlight / 120V-277V 0-10V, 120V Phase



4" LD Downlight Trim

Example: LD4DR308W-SF

CATALOG NUMBER	DESCRIPTION
LD4DR309W-SF	4" LD Downlight / 3000K / 90CRI / White / Self-Flanged
LD4DR359W-SF	4" LD Downlight / 3500K / 90CRI / White / Self-Flanged

>> QUICKSHIP



4" LD Non-IC Flat Frame (Downlight or Wall Wash)

Example: LD4NCL1D101-27

CATALOG NUMBER	DESCRIPTION
LD4NCL1D10127	12W / 1000 lm / 0-10V Dimming 1% / 277V
LD4NCL2D10127	16W / 1500 lm / 0-10V Dimming 1% / 277V



4" LD Downlight Trim

Example: LD4DR308W-SF

CATALOG NUMBER	DESCRIPTION
LD4DR309W-SF	4" LD Downlight / 3000K / 90CRI / White / Self-Flanged
LD4DR359W-SF	4" LD Downlight / 3500K / 90CRI / White / Self-Flanged

SD, Downlights & Cylinders



Balancing energy efficiency and optical control in a cost-effective package, SD offers clean, uniform light in 3 distinct distributions. With features such as 2 Step MacAdam binning and standard 0-10V dimming down to 1%, the SD Series provides everyday options for any commercial application. Building on the success of our award-winning SS Series, a new SD family delivers additional features in the simple to specify platform.

- Downlight and Cylinder
- 4" & 6" Round Apertures
- 1000 - 4,000 Lumens
- 2 Step MacAdam (2 SDCM)
- Clear & Haze Reflectors with 50° Cutoff

Distribution



30°
Narrow Flood



50°
Flood



70°
Wide Flood

>> LIGHTSPEED



4" SD Downlight

CATALOG NUMBER	DESCRIPTION
SD4DRL135-D101-WF	10W / 1000lm / 3500K / 80CRI / New Construction / 0-10V / 120V / 70° WF
SD4DRL235-D101-WF	14W / 1500lm / 3500K / 80CRI / New Construction / 0-10V / 120V / 70° WF
SD4DRL130-D10127-WF	10W / 1000lm / 3000K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD4DRL135-D10127-WF	10W / 1000lm / 3500K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD4DRL230-D10127-WF	14W / 1500lm / 3000K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD4DRL235-D10127-WF	14W / 1500lm / 3500K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD4DRL330-D10127-WF	19W / 2000lm / 3000K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD4DRL335-D10127-WF	19W / 2000lm / 3500K / 80CRI / New Construction / 0-10V / 277V / 70° WF



4" SD Downlight Reflector

CATALOG NUMBER	DESCRIPTION
IC430C-SF	Specular Clear Reflector / Self Flanged
IC430HZ-SF	Haze Reflector / Self Flanged



4" SD Lensed Downlight Reflector

CATALOG NUMBER	DESCRIPTION
IC432C-SF-CR	Specular Clear Reflector with Clear Tempered Lens / Self Flanged

Bar Hangers

CATALOG NUMBER	DESCRIPTION
I100	C-Channel Bar (pair)
I200	Flat Bar (pair)
I400	Architectural Bar (pair)

>> QUICKSHIP

**4" SD Downlight**

Example: SD4DRL130-NF

	CATALOG NUMBER	DESCRIPTION
	SD4DRL1	10W / 1000lm / New Construction Frame-In
	SD4DRL2	14W / 1500lm / New Construction Frame-In
	SD4DRL3	19W / 2000lm / New Construction Frame-In
	SD4DRL4	23W / 2500lm / New Construction Frame-In
	SD4DRL5	28W / 3000lm / New Construction Frame-In
CCT/CRI:	30	3000K / 80 CRI
	35	3500K / 80 CRI
DIMMING:	-D101	0-10V Dimming 1%
VOLTAGE:	(blank)	120V
	27	277V
OPTIC:	-NF	30° Narrow Flood
	-FL	50° Flood
	-WF	70° Wide Flood
OPTIONS:	EM7	7W Emergency Remote Backup (50pc Max Order Quantity)

**4" SD Downlight Reflector**

	CATALOG NUMBER	DESCRIPTION
	IC430C-SF	Specular Clear Reflector / Self Flanged
	IC430HZ-SF	Haze Reflector / Self Flanged

**4" SD Lensed Downlight Reflector**

	CATALOG NUMBER	DESCRIPTION
	IC432C-SF-CR	Specular Clear Reflector with Clear Tempered Lens / Self Flanged
	IC432HZ-SF-CR	Haze Reflector with Clear Tempered Lens / Self Flanged

Bar Hangers

	CATALOG NUMBER	DESCRIPTION
	I100	C-Channel Bar (pair)
	I200	Flat Bar (pair)
	I400	Architectural Bar (pair)

>> LIGHTSPEED

**4" SC Cylinder**

Example: SC4DRL130-D101-NF-WC-S

CATALOG NUMBER	DESCRIPTION
SC4DRL135-D101-WF-WC-C144	9W / 1000lm / 0-10V / 70° WF / White / Clear Reflector / 144" Aircraft Cable
SC4DRL235-D101-WF-WC-C144	13W / 1500lm / 0-10V / 70° WF / White / Clear Reflector / 144" Aircraft Cable
SC4DRL335-D101-WF-WC-C144	18W / 2000lm / 0-10V / 70° WF / White / Clear Reflector / 144" Aircraft Cable

>> QUICKSHIP

**4" SC Cylinder**

Example: SC4DRL130-D101-NF-WC-S

CATALOG NUMBER	DESCRIPTION
SC4DRL1	SD Cylinder / 9W / 1000lm
SC4DRL2	SD Cylinder / 13W / 1500lm
SC4DRL3	SD Cylinder / 18W / 2000lm
SC4DRL4	SD Cylinder / 22W / 2500lm
SC4DRL5	SD Cylinder / 26W / 3000lm
CCT/CRI:	
30	3000K / 80 CRI
35	3500K / 80 CRI
DIMMING:	
-D101	Osram 0-10V Dimming 1%
VOLTAGE:	
(blank)	Universal 120V/277V
OPTIC:	
-NF	30° Narrow Flood
-FL	50° Flood
-WF	70° Wide Flood
CYLINDER FINISH:	
-W	White Cylinder
-B	Black Cylinder
REFLECTOR FINISH:	
C	Clear Reflector
HZ	Haze Reflector
MOUNTING:	
-C144	144" Aircraft Cable
-S	Surface Mount

>> LIGHTSPEED**6" SD Downlight**

CATALOG NUMBER	DESCRIPTION
SD6DRL230-D10127-WF	14W / 1500lm / 3000K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD6DRL235-D10127-WF	14W / 1500lm / 3500K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD6DRL330-D10127-WF	19W / 2000lm / 3000K / 80CRI / New Construction / 0-10V / 277V / 70° WF
SD6DRL335-D10127-WF	19W / 2000lm / 3500K / 80CRI / New Construction / 0-10V / 277V / 70° WF

**6" SD Open Reflector**

CATALOG NUMBER	DESCRIPTION
IC630C-SF	Specular Clear Reflector / Self Flanged
IC630HZ-SF	Haze Reflector / Self Flanged

**6" SD Lensed Reflector**

CATALOG NUMBER	DESCRIPTION
IC632C-SF-CR	Specular Clear Reflector with Clear Tempered Lens / Self Flanged

Bar Hangers

CATALOG NUMBER	DESCRIPTION
I100	C-Channel Bar (pair)
I200	Flat Bar (pair)
I400	Architectural Bar (pair)

>> QUICKSHIP

**6" SD Downlight**

Example: SD6DRL127-D101-NF

CATALOG NUMBER	DESCRIPTION
SD6DRL1	10W / 1000lm / Downlight
SD6DRL2	14W / 1500lm / Downlight
SD6DRL3	19W / 2000lm / Downlight
SD6DRL4	23W / 2500lm / Downlight
SD6DRL5	28W / 3000lm / Downlight
SD6DRL6	33W / 3500lm / Downlight
SD6DRL7	38W / 4000lm / Downlight
CCT/CRI: 30	3000K / 80 CRI
35	3500K / 80 CRI
DIMMING: -D101	0-10V Dimming 1%
VOLTAGE: (blank)	120V
27	277V
OPTIC: -NF	30° Narrow Flood
-FL	50° Flood
-WF	70° Wide Flood
OPTIONS: EM7	7W Emergency Remote Backup (50pc Max Order Quantity)

**6" SD Open Reflector**

CATALOG NUMBER	DESCRIPTION
IC630C-SF	Specular Clear Reflector / Self Flanged
IC630HZ-SF	Haze Reflector / Self Flanged

**6" SD Lensed Reflector**

CATALOG NUMBER	DESCRIPTION
IC632C-SF-CR	Specular Clear Reflector with Clear Tempered Lens / Self Flanged
IC632HZ-SF-CR	Haze Reflector with Clear Tempered Lens / Self Flanged

Bar Hangers

CATALOG NUMBER	DESCRIPTION
I100	C-Channel Bar (pair)
I200	Flat Bar (pair)
I400	Architectural Bar (pair)


>> QUICKSHIP

**6" SD Cylinder**

Example: SC6DRL1309-DIM-NF-WW-C144

	CATALOG NUMBER	DESCRIPTION
	SC6DRL1	SD Cylinder / 9W / 1000lm
	SC6DRL2	SD Cylinder / 13W / 1500lm
	SC6DRL3	SD Cylinder / 18W / 2000lm
	SC6DRL4	SD Cylinder / 22W / 2500lm
	SC6DRL5	SD Cylinder / 26W / 3000lm
	SC6DRL6	SD Cylinder / 32W / 3500lm
CCT/CRI:	30	3000K / 80 CRI
	35	3500K / 80 CRI
DIMMING:	-D101	Osram 0-10V Dimming 1%
VOLTAGE:	(blank)	Universal 120V/277V
OPTIC:	-NF	30° Narrow Flood
	-FL	50° Flood
	-WF	70° Wide Flood
CYLINDER FINISH:	-W	White Cylinder
	-B	Black Cylinder
REFLECTOR FINISH:	C	Clear Reflector
	HZ	Haze Reflector
MOUNTING:	-C144	144" Aircraft Cable
	-S	Surface Mount

3.5" MX G2 Naked Non-IC Downlight

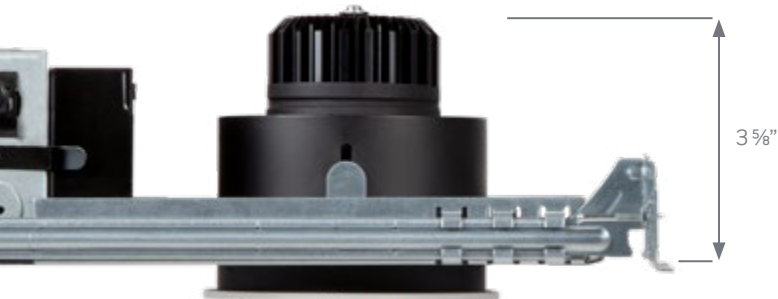

The MXG2 downlight is now available with a flat frame style IC housing that adds infield adjustment from 1/2-inch to 1 1/4-inch. This simplified option affords excellent value with no compromise in performance or below ceiling aesthetics.

- High performance 12° to 50° optics
- Up to 1850 lumens with 92 CRI
- Architectural grade die-cast aluminum trims
- Infield adjustable collar from 1/2" to 1-1/4"

>> QUICKSHIP



3.5" MX G2 Non-IC Naked New Construction Flat Frame

Example: MXFGDRTR-NCL0

	CATALOG NUMBER	DESCRIPTION
	MXFG2DRTR-NCL0	10W / Non-IC New Construction Flat Frame
	MXFG2DRTR-NCL1	16W / Non-IC New Construction Flat Frame
	MXFG2DRTR-NCL2	20W / Non-IC New Construction Flat Frame
	MXFG2DRTR-NCL3	26W / Non-IC New Construction Flat Frame
DIMMING:	-DELV -D101	Phase Dimming (120V only) 0-10V Dimming 1%
VOLTAGE:	(blank) 27	120V 277V
OPTIONS:	EM7	7W Emergency Backup (50pc Max Order Quantity)



3.5" MX G2 1-1/2" Regress Downlight Open Trim

Example: MXTFG2-RTRD300W-SFL02712

	CATALOG NUMBER	DESCRIPTION
	MXTFG2-RTRD300W-SF	White Downlight / Self Flanged
WATTAGE:	L0 L1 L2 L3	10W / 950lm 16W / 1300lm 20W / 1550lm 26W / 1850lm
CCT/CRI:	279 30 309 35	2700K / 92 CRI 3000K / 82 CRI 3000K / 92 CRI 3500K / 82 CRI
OPTIC:	12 24 36 50	12° Spot 24° Narrow Flood 36° Flood 50° Wide Flood

>> QUICKSHIP

**3.5" MX G2 Square Non-IC Naked New Construction Flat Frame**

Example: MXFG2DSTR-NCL0

	CATALOG NUMBER	DESCRIPTION
	MXFG2DSTR-NCL0	10W / Non-IC New Construction Flat Frame
	MXFG2DSTR-NCL1	16W / Non-IC New Construction Flat Frame
	MXFG2DSTR-NCL2	20W / Non-IC New Construction Flat Frame
	MXFG2DSTR-NCL3	26W / Non-IC New Construction Flat Frame
DIMMING:	-DELV	Phase Dimming (120V only)
	-D101	0-10V Dimming 1%
VOLTAGE:	(blank)	120V
	27	277V
OPTIONS:	EM7	7W Emergency Backup (50pc Max Order Quantity)

**3.5" MX G2 Square 1-1/2" Regress Downlight Open or Lensed Trim**

Example: MXTFG2-STRD300W-SFL02712

	CATALOG NUMBER	DESCRIPTION
	MXTFG2-STRD300W-SF	White Square Downlight / Self Flanged
WATTAGE:	L0	10W / 950lm
	L1	16W / 1300lm
	L2	20W / 1550lm
	L3	26W / 1850lm
CCT/CRI:	279	2700K / 92 CRI
	30	3000K / 82 CRI
	309	3000K / 92 CRI
	35	3500K / 82 CRI
OPTIC:	12	12° Spot
	24	24° Narrow Flood
	36	36° Flood
	50	50° Wide Flood

3.5" MX G2 Adjustable



The MX family allows for uniform and consistent lighting throughout an entire space making it the ideal product line for many applications including retail, commercial, hospitality and residential. This diverse line delivers smooth, beautiful illumination and impressive performance that delivers up to 1850lm.

Performance TIR Optics

High performance 12° to 50° optics producing up to 24,500 CBCP

Specification Grade Trims

Featuring a die-cast aluminum trim which provides an elegant specification grade look.

>> QUICKSHIP



3.5" MX G2 Adjustable

Example: MXG2ARTR-NCL0

CATALOG NUMBER	DESCRIPTION
MXG2ARTR-NC	Non-IC New Construction Housing

CEILING THICKNESS:	(blank)	5/8" Ceiling Thickness
WATTAGE:	L0 L1 L2 L3	10W 16W 20W 26W
DIMMING:	-DELV* -D101	Phase Dimming (120V only) 0-10V Dimming 1%
VOLTAGE:	(blank) 27	120V 277V
OPTIONS:	-EM7	7W Emergency Backup (50pc Max Order Quantity)



3.5" MX G2 1" Regress Accent Trim

Example: MXTG2-RTRA300W-SFL02712

CATALOG NUMBER	DESCRIPTION
MXTG2-RTRA300W-SF	White Accent / Self Flanged

WATTAGE:	L0 L1 L2 L3	10W / 950lm 16W / 1300lm 20W / 1550lm 26W / 1850lm
CCT/CRI:	279 30 309 35	2700K / 92 CRI 3000K / 82 CRI 3000K / 92 CRI 3500K / 82 CRI
OPTIC:	12 24 36 50	12° Spot 24° Narrow Flood 36° Flood 50° Wide Flood

Bar Hangers

CATALOG NUMBER	DESCRIPTION
I100	C-Channel Bar Hangers (Pair)
I200	Flat Bar Hangers (Pair)

>> QUICKSHIP

**3.5" MX G2 Square Adjustable**

Example: MXG2ARTR-NCL0

	CATALOG NUMBER	DESCRIPTION
	MXG2ASTR-NC	Non-IC New Construction Housing
CEILING THICKNESS:	(blank)	5/8" Ceiling Thickness
WATTAGE:	L0	10W
	L1	16W
	L2	20W
	L3	26W
DIMMING:	(blank)	Non-Dimming
	-DELV*	Phase Dimming (120V only)
	-D101	0-10V Dimming 1%
VOLTAGE:	(blank)	120V
	27	277V
OPTIONS:	-EM7	7W Emergency Backup (50pc Max Order Quantity)

**3.5" MX G2 1" Regress Square Accent Trim**

Example: MXTG2-RTRA300W-SFL02712

	CATALOG NUMBER	DESCRIPTION
	MXTG2-STRA300W-SF	White Accent / Self Flanged
WATTAGE:	L0	10W / 950lm
	L1	16W / 1300lm
	L2	20W / 1550lm
	L3	26W / 1850lm
CCT/CRI:	279	2700K / 92 CRI
	30	3000K / 82 CRI
	309	3000K / 92 CRI
	35	3500K / 82 CRI
OPTIC:	12	12° Spot
	24	24° Narrow Flood
	36	36° Flood
	50	50° Wide Flood

Bar Hangers

	CATALOG NUMBER	DESCRIPTION
	I100	C-Channel Bar Hangers (Pair)
	I200	Flat Bar Hangers (Pair)

Intense Lighting
3340 E. La Palma Ave.
Anaheim, CA 92806

T. 800.961.5321
T. 714.630.9877
F. 714.630.9883

www.intenselighting.com

A Leviton Company
www.leviton.com

Printed in the U.S.A
© Copyright 2021. Intense Lighting. All Rights Reserved.

Intense Lighting, LLC reserves the right to discontinue products or change the technical specifications of its products at any time without notice. Select products in this catalog have patent protection or patents pending.

INT0323-QS-1