

# I4IC

## 4" Line Voltage Housing IC Rated New Construction

<b>Catalog #:</b>	<b>Type:</b>
<b>Notes:</b>	

### Product Specifications

**Description:**

The I4IC recessed down light can be used for either commercial or residential new construction applications. For use insulated ceilings. Designed for direct contact with insulation.

**Lamp:**

50W 20PAR max.

**Socket:**

E26 Medium base socket

**Socket Plate:**

Adjustable socket plate adjusts and locks in position without tools for multiple lamp and trim types.

**Installation:**

Includes adjustable hanger bars (14"-25") with integral nail. Bar hangers can be repositioned 90° without tools. Barhangers can be locked into place with locking screws.

**Junction Box:**

Galvanized steel junction box with 1/2" and romex wiring knockouts, with removable access plates for easy installation.



**Thermal Protector:**

Integral thermal protector protects against improper lamping and insulation proximity.

**Labels:**

- NRTL listed for through-branch wiring and damp locations. (See trim for wet location listing).
- NRTL listed to US and Canadian safety standards.
- NRTL listed for direct contact with insulation

### Dimensions

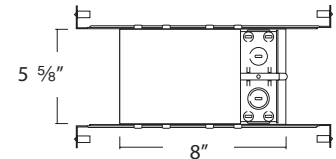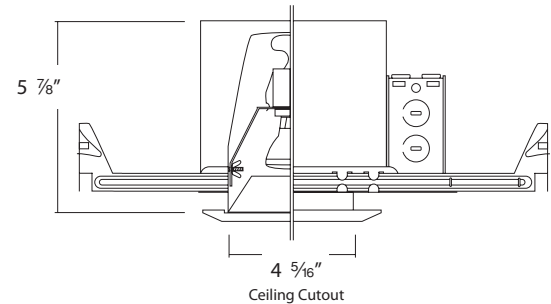

\*Note: Specifications and dimensions subject to change without notice.

2861. E La Palma Ave. • Anaheim, CA 92806 • Phone: 1.800.961.5321 • Fax: 1.800.961.5322 • [www.intenselighting.com](http://www.intenselighting.com)



**INTENSE**  
LIGHTING  
*Where Creativity and Performance Meet*





<b>Catalog #:</b>	<b>Type:</b>
<b>Notes:</b>	

## 4" Line Voltage Trims

### 4" Down Light Trims

	CATALOG #	DESCRIPTION	LAMP	FINISHES	TRIM OD
◆ 	IC43	4" Step Baffle Trim With Metal Ring	R20 / PAR 20 50W Max.	WW, PWW, BW, SN, MO	5 1/4"
	IC44	4" Deep Step Baffle W/ Metal Ring	R20 / PAR 20 50W Max.	PWW, PBW, PBB	5 1/4"
◆ 	ICR49	4" Reflector	R20 / PAR 20 50W Max.	WW, CW, BW, SDW	5 1/4"
	ICR43	4" Wall Wash With Clear Reflector	PAR16 50W Max.	WW, CW	5 1/4"
	IC42	4" Wall Wash With Baffle	PAR16 50W Max.	W, B	5 1/4"
	ICB48	4" Eyeball	R20 / PAR 20 50W Max.	W, SN, MO	5 1/4"
	ICA47	4" Adjustable Gimbal	R20 / PAR 20 50W Max.	W, SN, MO	5 1/4"

### 4" Shower Trims

● 	ICS43	4" Shower W/ Fresnel Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"
● 	ICS42	4" Shower W/ Albalite Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"
● 	ICS45	4" Shower W/ Sand Blasted Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"
● 	ICS47	4" Shower W/ Frosted Spot Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"

#### Key Code:

● : Wet Location Listed ◆ : Optional metal trim ring. Specify MW (metal white), B (metal black), C (clear), MO (mocha), SN (satin nickel)

Special order trim ring Specify G (gold), AN (antique nickel), AC (antique copper), CAP (cappuccino)

Finish: W (white), B (black), SN (satin nickel), MO (mocha), PW (phenolic white). Reflector Finish: C (clear), W (white), B (black), G (gold), SD (semi diffuse)

\*Note: Specifications and dimensions subject to change without notice.

