

Magnetic Transformer

Direct Burial Magnetic

Catalog #:	Type:
Notes:	

Product Specifications

300W Magnetic Transformer

ITM-DB-300-12-27

Transformer Type:
Step down, low voltage isolation

Primary Voltage:
120 VAC - 60HZ - 2.75A max


Secondary Voltage:
12 VAC - 25A max
Watertight lid with gasket
C-ETL for Canada

ITM-DB-300-12-27

Transformer type:
Step down, low voltage isolation

Primary Voltage:
277 VAC - 60HZ - 1.2A max

Secondary Voltage:
24 VAC - 15A max
3R Case
C-ETL for Canada

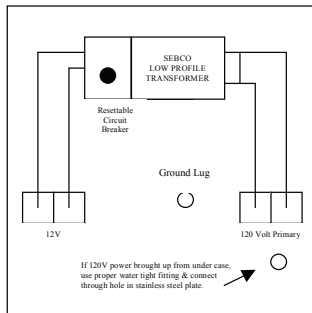

600W Magnetic Transformer

ITM-DB-600-12

Transformer type:
Step down, low voltage isolation

Primary voltage:
120 VAC - 60HZ - 5.5A max


Secondary Voltage:
12 VAC - 2 x 25A max
Water tight cover with gasket
C-ETL for Canada

ITM-DB-600-12-27


Transformer Type:
Step down, low voltage isolation

Primary Voltage:
120 VAC - 60HZ - 5.5A max

Secondary Voltage:
12 VAC - 2 X 25A max
Watertight cover with gasket
C-ETL for Canada

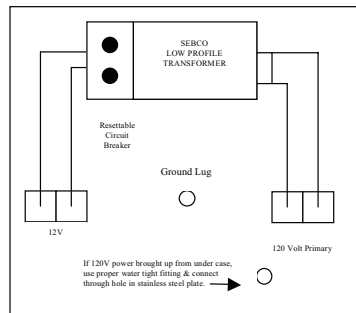

Dimensions

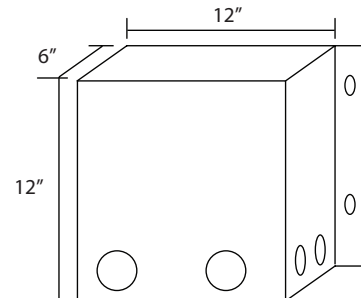

DIRECT BURIAL MAGNETIC TRANSFORMER	DESCRIPTION	CATALOG #
DIRECT BURIAL 120V MAGNETIC TRANSFORMER 12V 300W	4 1/2" KO. Single fused output (wiring box) 300W / 120V	ITM-DB-300-12
DIRECT BURIAL 277V MAGNETIC TRANSFORMER 12V 300W	4 1/2" KO. Single fused output (wiring box) 300W / 277V	ITM-DB-300-12-27
DIRECT BURIAL 120V MAGNETIC TRANSFORMER 12V 600W	4 1/2" KO. Single fused output (wiring box) 600W / 120V	ITM-DB-600-12
DIRECT BURIAL 277V MAGNETIC TRANSFORMER 12V 600W	4 1/2" KO. Single fused output (wiring box) 600W / 277V	ITM-DB-600-12-27

*Note: Specifications and dimensions subject to change without notice.

2861. E La Palma Ave. • Anaheim, CA 92806 • Phone: 1.800.961.5321 • Fax: 1.800.961.5322 • www.intenselightning.com

