

# I4R

## 4" Line Voltage Housing Non-IC Remodel

<b>Catalog #:</b>	<b>Type:</b>
<b>Notes:</b>	

### Product Specifications

**Description:**

The I4 R recessed down light can be used for either commercial or residential remodel applications. Housing installs through existing cut out and is secured in place by four high tension springs. For use in non-insulated ceilings or must be kept at least 3" away from insulation.

**Lamp:**

50W 20PAR max.

**Socket:**

E26 Medium base socket

**Socket Plate:**

Adjustable socket plate adjusts and locks in position without tools for multiple lamp and trim types.

**Installation:**

Three high tension springs secure housing into ceiling with up to 5/8" thickness.

**Junction Box:**

Galvanized steel junction box with 1/2" and romex wiring knockouts, with removable access plates for easy installation.


**Thermal Protector:**

Integral thermal protector protects against improper lamping and insulation proximity.

**Labels:**

- NRTL listed for through-branch wiring and damp locations. (See trim for wet location listing).
- NRTL listed to US and Canadian safety standards.

### Dimensions

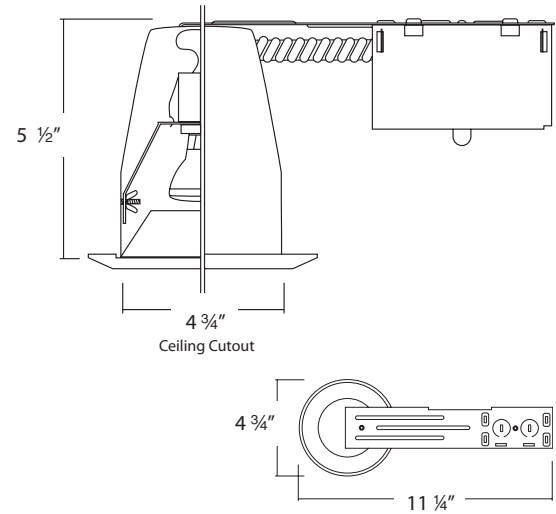


\*Note: Specifications and dimensions subject to change without notice.







<b>Catalog #:</b>	<b>Type:</b>
<b>Notes:</b>	

## 4" Line Voltage Trims

### 4" Down Light Trims

	CATALOG #	DESCRIPTION	LAMP	FINISHES	TRIM OD
◆ 	IC43	4" Step Baffle Trim With Metal Ring	R20 / PAR 20 50W Max.	WW, PWW, BW, SN, MO	5 1/4"
	IC44	4" Deep Step Baffle W/ Metal Ring	R20 / PAR 20 50W Max.	PWW, PBW, PBB	5 1/4"
◆ 	ICR49	4" Reflector	R20 / PAR 20 50W Max.	WW, CW, BW, SDW	5 1/4"
	ICR43	4" Wall Wash With Clear Reflector	PAR16 50W Max.	WW, CW	5 1/4"
	IC42	4" Wall Wash With Baffle	PAR16 50W Max.	W, B	5 1/4"
	ICB48	4" Eyeball	R20 / PAR 20 50W Max.	W, SN, MO	5 1/4"
	ICA47	4" Adjustable Gimbal	R20 / PAR 20 50W Max.	W, SN, MO	5 1/4"

### 4" Shower Trims

● 	ICS43	4" Shower W/ Fresnel Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"
● 	ICS42	4" Shower W/ Albalite Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"
● 	ICS45	4" Shower W/ Sand Blasted Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"
● 	ICS47	4" Shower W/ Frosted Spot Lens	R20 / PAR20 50W Max.	W, SN, MO	5 1/4"

#### Key Code:

● : Wet Location Listed ◆ : Optional metal trim ring. Specify MW (metal white), B (metal black), C (clear), MO (mocha), SN (satin nickel)

Special order trim ring Specify G (gold), AN (antique nickel), AC (antique copper), CAP (cappuccino)

Finish: W (white), B (black), SN (satin nickel), MO (mocha), PW (phenolic white). Reflector Finish: C (clear), W (white), B (black), G (gold), SD (semi diffuse)

\*Note: Specifications and dimensions subject to change without notice.

