

IF4

4" Compact Fluorescent Non-IC New Construction

Catalog #:	Type:
Notes:	

Product Specifications

Description:

The IF4 recessed down light can be used for either commercial or residential new construction applications. For use in non-insulated ceilings. Must be kept at least 3" away from insulation.

Lamp:

(1) 13/18/26W 4 Pin TRT
*see trim for max wattage.

Socket:

Universal GX24 4-Pin Socket

Socket Plate:

Adjustable socket plate adjusts and locks in position without tools for multiple lamp and trim types.

Junction Box:

Galvanized steel junction box with 1/2" and romex wiring knockouts, with removable access plates for easy installation.

Installation:

Includes adjustable hanger bars (14"-25") with integral nail. Bar hangers can be repositioned 90° without tools. Barhangers can be locked into place with locking screws.

Ballast:

Advance Electronic 120/277V: 13/18/26W 4 PIN triple tube or quad lamp, NRTL listed, High power factor, Class P, sound rated A, type 1 outdoor, inherent Thermal Protection, no PCB's. Min start 0°F. Max THD 10%.

Advance Mark X Dimming Ballast:

- Dimming Range: 100% - 5% full range continuous dimming (T5/HO to 1%)
- Lamp Starting: programmed rapid start
- Programmed Start operation
- Minimum Lamp Starting Temperature: 10°C (50°F)
- Operating Voltage: 120V or 277V at 60Hz
- Total Harmonic Distortion (THD): less than 10%
- Minimizes risk of interference with infrared remote control systems and provides continuous flicker-free dimming

Lutron Hi-Lume Dimming:

- Dimming Range: 100% to 5% measured relative light output (RLO)
- Lamp Starting: programmed rapid start
- Minimum Lamp Starting Temperature: 10°C (50°F)
- Ambient Temperature Operating Range: 10°C (50°F) to 60°C (140°F)
- Relative Humidity: maximum 90% non-condensing
- Operating Voltage: 120V or 277V at 60Hz
- Power Factor: greater than .95
- Total Harmonic Distortion (THD): less than 10%
- Maximum Ballast Case Temperature: 75°C (167°F)



Emergency Backup:

The compact fluorescent emergency ballast allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the ballast switches to emergency mode and operates (1) or (2) lamps for 90 minutes. The unit contains a battery, charger and inverter circuit in a single can. Ballast is factory prewired. Standard EM includes switch/charge indicator accessory kits.

Labels:

- NRTL listed for through-branch wiring and damp locations.
- NRTL listed to US and Canadian safety standards.

Dimensions

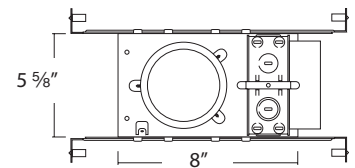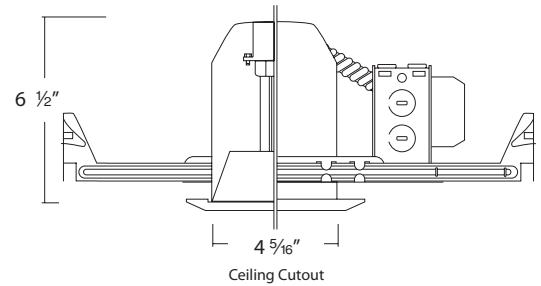

650 Lumen Emergency Backup Average Lumen Ratings			1300 Lumen Emergency Backup Average Lumen Ratings		
Lamp	1	2	Lamp	1	2
13W PL CF	350	400	13W PL CF	600	675
18W PL CF QUAD	350	550	18W PL CF QUAD	600	950
26W PL CF QUAD	425		26W PL CF QUAD	725	1200
32W PL CF QUAD 4-PIN	600		32W PL CF QUAD 4-PIN	1050	1250
42W PL CF QUAD 4-PIN	750		42W PL CF QUAD 4-PIN	1300	

Ordering Matrix

Series	Lamp/Wattage	Ballast/Voltage	Options
IF4	13 (1) 13W TRT 18 (1) 18W TRT 26 (1) 26W TRT	E electronic 120/277V -ADV 120V advance dimming -ADV-27 277V advance dimming -LUT 120V lutron dimming -LUT-27 277V lutron dimming	-EM Emergency battery back up with remote test switch 600 lumen -EM-13 Emergency battery back up with remote test switch 1300 lumen

*Note: Specifications and dimensions subject to change without notice.




2861. E La Palma Ave. • Anaheim, CA 92806 • Phone: 1.800.961.5321 • Fax: 1.800.961.5322 • www.intenselight.com






Catalog #:	Type:
Notes:	

4" Compact Fluorescent Trims

4' Down Lights

	CATALOG #	DESCRIPTION	LAMP	FINISHES	TRIM OD
◆ 	ICFR49	4" Reflector	(1) 13/18/26W TRT 13/BW for AIC	WW, CW, SDW	5 ¼"
	ICFR43	4" Wall Wash With Clear Reflector	(1) 13/18/26W TRT 13/BW for AIC	W, WW	5 ¼"
	ICF40	4" Clear Reflector With Drop Glass	(1) 13/18/26W TRT 13/BW for AIC	W, C	5 ¼"

Wet Location Downlights

● 	ICFS43	4" Shower Trim With Fresnel Lens	(1) 13/18W TRT	W, SN, MO	5 ¼"
● 	ICFS45	4" Shower Trim With Sand Blasted Lens	(1) 13/18W TRT	W, SN, MO	5 ¼"
● 	ICFS47	4" Shower Trim With Frosted Spot Lens	(1) 13/18W TRT	W, SN, MO	5 ¼"

Key Code:

● : Wet Location Listed ◆ : Optional metal trim ring. Specify MW (metal white), B (metal black), C (clear), MO (mocha), SN (satin nickel)

Special order trim ring Specify G (gold), AN (antique nickel), AC (antique copper), CAP (cappuccino)

Finish: W (white), B (black), SN (satin nickel), MO (mocha), PW (phenolic white). Reflector Finish: C (clear), W (white), B (black), G (gold), SD (semi diffuse)

*Note: Specifications and dimensions subject to change without notice.

2861. E La Palma Ave. • Anaheim, CA 92806 • Phone: 1.800.961.5321 • Fax: 1.800.961.5322 • www.intenselightning.com



INTENSE
LIGHTING
Where Creativity and Performance Meet