


# IA600

## 6" Incandescent Adjustable Architectural Frame

Catalog Number	Type
Notes	

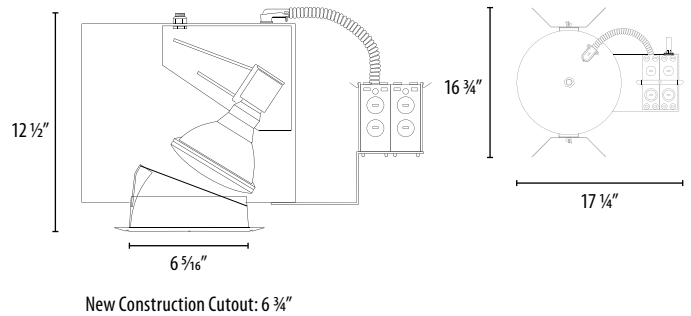

### Housing Matrix | Example: IA600-I400

Series		Options	
A		B	
A	Series	B	Options
IA600	6" Adjustable Incandescent	-1100	C-Channel bar hanger
		-1200	Flat bar hanger
		-1400	Wood joist hanger bar

### Description:

Incandescent adjustable accent with 40° vertical adjustment and 358° rotation. Applications include wall washing and accent lighting. Recommended for higher ceiling areas or applications that require higher illumination levels.

### Lamp:

PAR30 75W max.  
PAR38 150W max.

### Socket:

E26 medium base

### Mounting Frame:

Heavy duty powder coated steel frame. Universal mounting brackets are furnished on all fixtures. C-channels and EMT are the preferred system for T-bar ceilings. Flat bars are ideal for hard ceilings.

### Listing:

NRTL listed for thru-branch wiring and damp locations. Use of designated trims allows use in wet location. See trim selection. For non-IC recessed installation. NRTL listed to US / Canadian standards.



### 6" Accent Reflector

High quality reflector.  
OD: 7 1/4"

<b>IC60040C-SF</b>	Clear Reflector Self Flanged
<b>IC60040C-SFW</b>	Clear Reflector Self Flanged White
<b>IC60040SD-SF</b>	Semi Diffuse Reflector Self Flanged
<b>IC60040SD-SFW</b>	Semi Diffuse Reflector Self Flanged White



### 6" Wall Wash With Spread lens

High quality reflector w/ glass spread lens.  
OD: 7 1/4"

<b>ICH615C-SF</b>	Clear Reflector Self Flanged
<b>ICH615C-SFW</b>	Clear Reflector Self Flanged White
<b>ICH615SD-SF</b>	Semi Diffuse Reflector Self Flanged
<b>ICH615SD-SFW</b>	Semi Diffuse Reflector Self Flanged White