


ARISTA®

IA600 / IC695

6" Adjustable Incandescent / Accent Reflector

Catalog Number	Type
Notes	

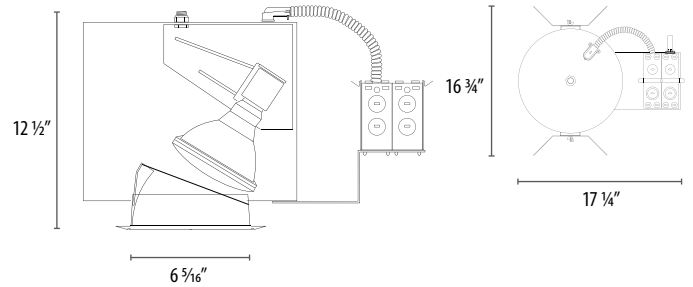

Housing Matrix | Example: IA600-I100

Series		Options	
A		B	
A	Series	B	Options
IA600	6" Adjustable	-I100	C-Channel Bar Hanger
		-I200	Flat Bar Hanger
		-I400	Wood Joist Bar Hanger

Trim Matrix | Example: IC695C-SFW

Series		Reflector Color	Flange
A		B	C
A	Series	C	Flange
IC695	6" Accent Reflector	-SF	Self Flanged
		-SFW	Self Flanged White
B	Reflector Color		
C	Clear		
HZ	Haze		

Description:

Incandescent adjustable accent with 40° vertical adjustment and 358° rotation. Applications include wall washing and accent lighting. Recommended for higher ceiling areas or applications that require higher illumination levels.

Reflector Optics:

Steep angle wall wash reflector for general wall illumination. Specification grade Alzak® reflector 1.5mm thickness. Made in the USA. Reflectors are available in architectural finishes clear and haze. Architectural, indiscrete self flange is standard. Optional painted white flange is available. Alzak® reflector is made in the USA.

Lamp:

PAR30 75W max.
PAR38 150W max.

Socket:

E26 medium base

Mounting Frame:

Heavy duty powder coated steel frame. Universal mounting brackets are installed on all fixtures. C-channels and EMT are the preferred system for T-bar ceilings. Flat bars are ideal for hard ceilings.

Listing:

NRTL listed for thru-branch wiring and damp locations. For non-IC recessed installation. NRTL listed to US and Canadian standards.


ARISTA®

6" Incandescent Accent Lamp Performance Data

Lamp data is extracted from lamp manufacturer's lamp photometrics.

FC= foot candles; L= beam length; W= beam width; D= distance; C= distance to center of beam; CP= candle power

Catalog Number	Type
Notes	

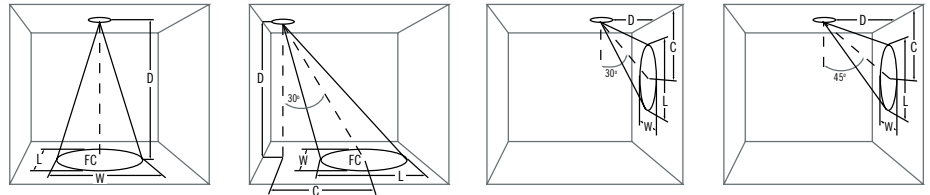

Lamp	Rated Life	CP	Beam Spread	0° Aiming					30° Aiming					30° Aiming					45° Aiming				
				D	FC	W	L	C	D	FC	W	L	C	D	FC	W	L	C	D	FC	W	L	C
				50W PAR30 NSP	2500	9000	8°	7'	188	1.0'	1.0'	NA	6'	166	1.0'	1.1'	3.5'	2'	288	0.6'	1.1'	3.5'	4'
50W PAR30 FL	3000	2000	25°	4'	125	1.8'	1.8'	NA	3'	144	1.5'	1.8'	1.7'	1'	250	0.9'	2.1'	1.7'	3'	79	1.9'	2.8'	3.0'
50W PAR30 FL	3000	1400	35°	6'	56	2.7'	2.7'	NA	5'	52	2.6'	3.0'	2.9'	2'	63	1.8'	4.2'	3.5'	4'	44	2.5'	3.7'	4.0'
50W PAR30 FL	3000	1400	35°	8'	31	3.5'	3.5'	NA	7'	27	3.6'	4.2'	4.0'	3'	28	2.7'	6.2'	5.2'	5'	28	3.1'	4.7'	5.0'
50W PAR30 FL	3000	1400	35°	10'	20	4.4'	4.4'	NA	9'	16	4.6'	5.4'	5.2'	4'	16	3.5'	8.3'	6.9'	6'	20	3.8'	5.6'	6.0'
50W PAR30 FL	3000	1400	35°	3'	156	1.9'	1.9'	NA	3'	101	2.2'	2.6'	1.7'	1'	175	1.3'	3.6'	1.7'	2'	124	1.8'	2.8'	2.0'
50W PAR30 FL	3000	1400	35°	5'	58	3.2'	3.2'	NA	5'	36	3.6'	4.3'	2.9'	2'	44	2.5'	7.2'	3.5'	3'	55	2.7'	4.2'	3.0'
50W PAR30 FL	3000	1400	35°	7'	29	4.4'	4.4'	NA	7'	19	5.1'	6.1'	4.0'	3'	19	3.6'	10.8'	5.2'	4'	31	3.6'	5.6'	4.0'
50W PAR30 FL	3000	1400	35°	9'	17	5.7'	5.7'	NA	9'	11	6.6'	7.8'	5.2'	4'	11	5.0'	14.4'	6.9'	5'	20	4.5'	7.0'	5.0'
75W PAR30 NSP	2500	14000	9°	8'	219	1.3'	1.3'	NA	7'	186	1.3'	1.5'	4.0'	3'	194	0.9'	1.9'	5.2'	5'	196	1.1'	1.6'	5.0'
75W PAR30 NSP	2500	14000	9°	12'	97	1.9'	1.9'	NA	10'	91	1.8'	2.1'	5.8'	4'	109	1.3'	2.6'	6.9'	7'	101	1.6'	2.2'	7.0'
75W PAR30 NSP	2500	14000	9°	16'	55	2.5'	2.5'	NA	13'	54	2.4'	2.7'	7.5'	5'	70	1.6'	3.2'	8.7'	9'	61	2.0'	2.9'	9.0'
75W PAR30 NSP	2500	14000	9°	20'	35	3.1'	3.1'	NA	16'	36	2.9'	3.4'	9.2'	6'	49	1.9'	3.6'	10.4'	11'	41	2.4'	3.5'	11.0'
75W PAR30 NFL	2500	3200	30°	6'	89	3.2'	3.2'	NA	5'	83	3.1'	3.7'	2.9'	2'	100	2.1'	5.5'	3.5'	3'	126	2.3'	3.5'	3.0'
75W PAR30 NFL	2500	3200	30°	8'	50	4.3'	4.3'	NA	7'	42	4.3'	5.1'	4.0'	3'	44	3.2'	8.2'	5.2'	5'	45	3.8'	5.8'	5.0'
75W PAR30 NFL	2500	3200	30°	10'	32	5.4'	5.4'	NA	9'	26	5.6'	6.6'	5.2'	4'	25	4.3'	10.9'	6.9'	7'	23	5.3'	8.1'	7.0'
75W PAR30 NFL	2500	3200	30°	12'	22	6.4'	6.4'	NA	11'	17	6.8'	8.1'	6.4'	5'	16	5.4'	13.7'	8.7'	9'	14	6.6'	10.4'	9.0'
75W PAR30 FL	2500	2000	40°	4'	125	2.9'	2.9'	NA	3'	144	2.5'	3.0'	1.7'	1'	250	1.5'	4.8'	1.7'	3'	79	3.1'	5.0'	3.0'
75W PAR30 FL	2500	2000	40°	6'	56	4.4'	4.4'	NA	5'	52	4.2'	5.1'	2.9'	2'	63	2.9'	9.7'	3.5'	4'	44	4.1'	6.7'	4.0'
75W PAR30 FL	2500	2000	40°	8'	31	5.8'	5.8'	NA	7'	27	5.9'	7.1'	4.0'	3'	28	4.4'	14.5'	5.2'	5'	28	5.1'	8.4'	5.0'
75W PAR30 FL	2500	2000	40°	10'	20	7.3'	7.3'	NA	9'	16	7.6'	9.1'	5.2'	4'	16	5.8'	19.3'	6.9'	6'	20	6.2'	10.1'	6.0'