


ARISTA®

IA800 / IC895

8" Adjustable Incandescent / Accent Reflector

Catalog Number	Type
Notes	

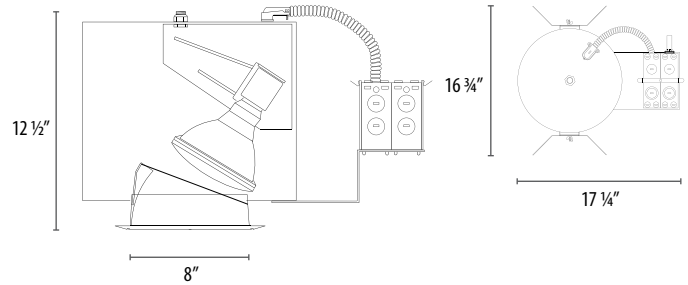

Housing Matrix | Example: IA800-I400

Series		Option	
A		B	
A	Series	B	Options
IA800	8" Adjustable	-1100	C-Channel Bar Hanger
		-1200	Flat Bar Hanger
		-1400	Wood Joist Bar Hanger

Trim Matrix | Example: IC895C-SFW

Series		Reflector Color	Flange
A		B	C
A	Series	C Flange	
IC895	8" Accent Reflector	-SF	Self Flanged
		-SFW	Self Flanged White
B	Reflector Color		
C	Clear		
HZ	Haze		

Description:

Incandescent adjustable accent with 40° vertical adjustment and 358° rotation. Applications include wall washing and accent lighting. Recommended for higher ceiling areas or applications that require higher illumination levels.

Reflector Optics:

Specification grade Alzak® 1.5mm thickness reflector. Designed with steep angle cut reflector for general wall illumination. Available in clear or haze finish with polished indiscrete self flange, optional painted white flange available. Reflector is made in the USA.

Lamp:

PAR38 150W max.

Socket:

E26 medium base

Mounting Frame:

Frame is constructed from heavy duty black powder coated steel. Frame includes universal mounting brackets. C-channel bars and EMT are the preferred system for t-bar ceilings and flat bars are ideal for hard ceilings.

Listing:

NRTL listed for thru-branch wiring and damp locations. For non-IC recessed installation. NRTL listed to US and Canadian standards.


ARISTA®

8" Incandescent Accent Lamp Performance Data

Lamp data is extracted from lamp manufacturer's lamp photometrics.

FC= foot candles; L= beam length; W= beam width; D= distance; C= distance to center of beam; CP= candle power

Catalog Number	Type
Notes	

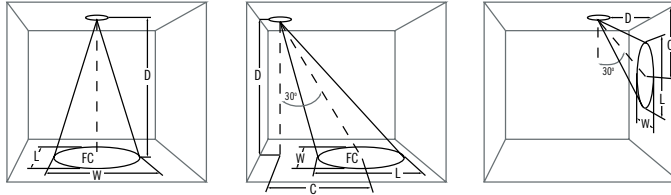

Lamp	Rated Life	CP	Beam Spread	0° Aiming					30° Aiming					30° Aiming				
				D	FC	W	L	C	D	FC	W	L	C	D	FC	W	L	C
75W PAR38 SP	2000	5200	12°	6'	144	1.3'	1.3'	NA	5'	135	1.2'	1.4'	2.9'	2'	163	0.8'	1.7'	3.5'
				8'	81	1.7'	1.7'	NA	7'	69	1.7'	2.0'	4.0'	3'	72	1.3'	2.6'	5.2'
				10'	52	2.1'	2.1'	NA	9'	42	2.2'	2.5'	5.2'	4'	41	1.7'	3.5'	6.9'
				12'	36	2.5'	2.5'	NA	11'	28	2.7'	3.1'	6.4'	5'	26	2.1'	4.3'	8.7'
75W PAR38 FL	2000	1860	25°	4'	116	2.1'	2.1'	NA	3'	134	1.9'	2.2'	1.7'	1'	233	1.1'	2.7'	1.7'
				6'	52	3.2'	3.2'	NA	5'	48	3.1'	3.7'	2.9'	2'	58	2.1'	5.5'	3.5'
				8'	29	4.3'	4.3'	NA	7'	25	4.3'	5.1'	4.0'	3'	26	3.2'	8.2'	5.2'
				10'	19	5.4'	5.4'	NA	9'	15	5.6'	6.6'	5.2'	4'	15	4.3'	10.9'	6.9'
150W PAR38 SP	2000	10500	14°	8'	164	2.0'	2.0'	NA	7'	139	2.0'	2.3'	4.0'	3'	146	1.5'	3.1'	5.2'
				12'	73	2.9'	2.9'	NA	10'	68	2.8'	3.3'	5.8'	4'	82	2.0'	4.1'	6.9'
				16'	41	3.9'	3.9'	NA	13'	40	3.7'	4.3'	7.5'	5'	53	2.5'	5.1'	8.7'
				20'	26	4.9'	4.9'	NA	16'	26	4.5'	5.3'	9.2'	6'	36	2.9'	6.2'	10.4'
150W PAR38 FL	2000	4000	30°	6'	111	3.2'	3.2'	NA	5'	104	3.1'	3.7'	2.9'	2'	125	2.1'	5.5'	3.5'
				8'	63	4.3'	4.3'	NA	7'	53	4.3'	5.1'	4.0'	3'	56	3.2'	8.2'	5.2'
				10'	40	5.4'	5.4'	NA	9'	32	5.6'	6.6'	5.2'	4'	31	4.3'	10.9'	6.9'
				12'	28	6.4'	6.4'	NA	11'	21	6.8'	8.1'	6.4'	5'	20	5.4'	13.7'	8.7'