
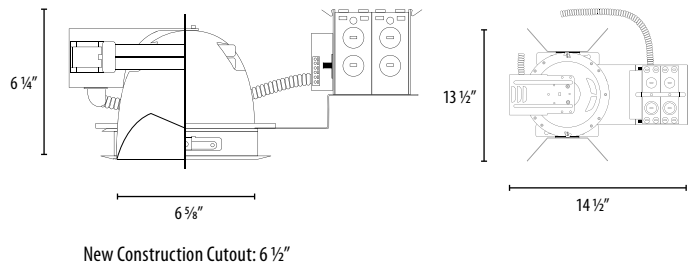


IFW6

6" Compact Fluorescent Horizontal Wall Wash Architectural Frame

Catalog Number	Type
Notes	



Housing Matrix | IFW613E-100

Series	Lamp	Ballast	Options
A	B	C	D
A	Series	C	Ballast
IFW6	6" Compact Fluorescent Wall Wash	E	Electronic 120/277V
		E-347	Electronic 347V
		-ADV	Advance Dimming 120V ²
		-ADV-27	Advance Dimming 277V ²
		-LUT	Lutron Dimming 120V ²
		-LUT-27	Lutron Dimming 277V ²
B	Lamp	D	Options
13	(1) 13W DTT	-I100	C-Channel bar hanger
18	(1) 18W DTT	-I200	Flat bar hanger
26	(1) 26W DTT	-I400	Wood joist hanger bar
32	(1) 32W TRT	-EM	Emergency 650 lm
213	(2) 13W DTT	-EM-13	Emergency 1300 lm
218	(2) 18W DTT		
226	(2) 26W DTT		

Description:

Compact fluorescent spread lens wall wash with horizontal lamp configuration for optimum performance. Directional prismatic lens with angle cut reflector directs light smoothly down wall. Applications include commercial or retail.

Lamp:

- (1) 13/18/26W DTT 4-Pin
- (1) 32W TRT 4-Pin
- (2) 13/18/26W DTT 4-Pin

Socket:

Universal G24 4-Pin

Mounting Frame:

Heavy duty galvanized steel frame. Universal mounting brackets are furnished on all fixtures. C-channels and EMT are the preferred system for T-bar ceilings. Flat bars are ideal for hard ceilings.

Ballast:

Electronic Advance SmartMate Universal 120/277V electronic smart ballast to operate 1 and 2 lamp configurations from 13W to 42W. Programmed rapid start design will preheat lamp cathodes before applying full arc voltage. End of life protection circuitry ensures safe operation throughout entire lamp life cycle. 18°C minimum starting temp

Dimming:

Advance Mark X and Lutron Hi-Lume dimming ballast provide continuous, flicker free dimming from 100% to 5% for 18W-42W 4-pin lamps. Programmed rapid start design will preheat lamp cathodes before applying full arc voltage. End of life protection circuitry ensures safe operation throughout entire lamp life cycle. 10°C minimum starting temp.

Emergency:

- U.L. and C.U.L. Listed
- Long-Life High-Temperature Recyclable Ni-Cad Battery
- Painted Steel Case
- 90-Minute Emergency Operation
- Includes Test Switch/Charge Indicator Accessory Kit
- Dual Voltage 120/277V, 60Hz
- Time Delay Enhancement
- Open Circuit Isolation
- 5-Year Warranty

Listing:

NRTL listed for thru-branch wiring and damp locations. For non-IC recessed installation. NRTL listed to US and Canadian standards.



Wall Wash With Spread lens

High quality low iridescent reflector with glass spread lens.
OD: 7 1/4"

ICW615C-SF	Clear Reflector / Self Flanged
ICW615C-SFW	Clear Reflector / Self Flanged White
ICW615SD-SF	Semi Diffused Reflector / Self Flanged Semi Diffused
ICW615SD-SFW	Semi Diffused Reflector / Self Flanged Semi Diffused White

Notes:

2 - 13W dimming only available in Advance Mark VII. Consult factory.

