




# ILED90S

## 11" Stainless Steel Step Light LED



Catalog Number	Type
Notes	

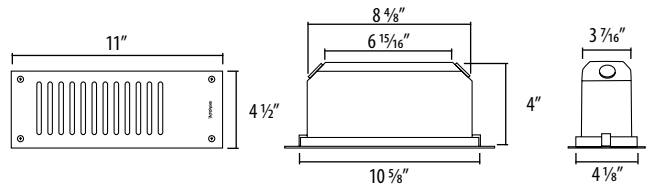


-AB: Albalite Face



-HG: Horizontal Louver



-G: Vertical Louver



-LG: Long Vertical Louver



-OP: Opal Face

### Step Light Matrix | Example : ILED90R-27-ED

Series	LED Color	Voltage	Face Plate
A	B	C	D
<b>A</b>	Series	<b>C</b>	Voltage
<b>ILED90S</b>	11" Stainless Steel LED Step Light	blank -27	120V 277V
<b>B</b>	LED Color	<b>D</b>	Face Plate
<b>R</b>	Red	<b>-G</b>	Vertical Louver
<b>G</b>	Green	<b>-LG</b>	Long Vertical Louver
<b>B</b>	Blue	<b>-HG</b>	Horizontal Louver
<b>A</b>	Amber	<b>-OP</b>	Opal Face
<b>W</b>	White 6000K	<b>-AB</b>	Albalite Face
<b>NW</b>	White 3500K		

### Description:

The IFS90S series is an oversized compact fluorescent or LED die-cast housing step light with four optional stainless steel louvers for use in concrete or block wall construction. Provides safe illumination in a low profile recessed fixture. For outdoor applications. For wall mount only. Corrosion resistant, ideal for harsh environment.

### Features:

- Electronic ballast with integral thermal protection
- Marine grade 316 stainless steel louvers
- ETL wet location listed

### Lamp / Socket:

LED: 2W

### LED Light Source:

- Proprietary 120° LED
- Color variable upon color selection
- Amber, red, green blue and white
- 50,000 hours of potential illuminating life

### Louver Trim:

Trim constructed from marine grade 316 stainless steel. Choice of five louvers. Vertical grill, long vertical grill, opal face, albalite face and horizontal grill.

### Housing:

Aluminum die-casting containing less than .3% copper to prevent corrosion. Two 1/2" threaded knockouts provided for power feed. Stainless steel fasteners, single piece molded silicone gasket.

### Installation:

For wall recessed mounting only. For use in concrete or block wall construction. Insulation must be kept at least 3" away from all surfaces of lighting fixture.

### Maintenance:

Stainless steel requires regular cleaning and maintenance to prevent tarnishing or tea staining.

### Listing:

NRTL listed for wet locations. NRTL listed to US and Canadian standards.

