
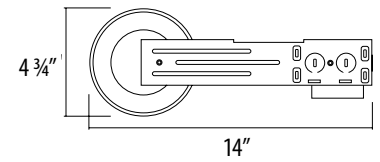


# IV4R-39MH

4" Ceramic Metal Halide Non-IC Remodel 39W GX10 120/277V

Catalog Number	Type
Notes	

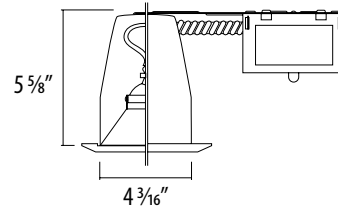

**Ceiling Cut-Out:** 4 3/16"  
**Height:** 5 5/8"

## Housing Matrix | Example: IV4R-39MH

Series	
<b>A</b>	Series
<b>IV4R-39MH</b>	4" Metal Halide Non-IC Remodel Recessed Housing

### Description:

The IV4R-20MH recessed down light can be used for either commercial or residential remodel applications. Housing installs through existing cut out and is secured in place by four high tension springs. For use in non-insulated ceilings or must be kept at least 3" away from insulation.

### Lamp:

39W ConstantColor® CMH® Precise™ MR16

### Socket:

GX10 twist and lock

### Installation:

Four high tension springs secure housing into ceiling with up to 3/8" thickness. Installation must be kept at least 3" away from housing and wiring compartments.

### Junction Box:

Junction box is prewired and UL listed for through branch wiring, (4 in / 4 out) 12AWG 90°C branch circuit conductors max. Junction box has (5) 1/2" and (1) 3/4" knockouts with pryout slots. Removable access plates for easy installation.

### 39W 120/277V Electronic HID ballasts

- Minimum starting temperature -30°C
- Maximum case temperature 80°C
- Sound rating A
- Safety listed UL type 1 outdoor
- Frequency 50/60Hz
- Line Regulation +/-0.5 output variation over full input range
- Power Factor > 0.99
- Total Harmonic Distortion < 10%
- Transient Protection
- Short Circuit Protection
- Thermal Protection
- Open Circuit / No Lamp / Hot Lamp
- Shutdown, Retry and Ignition Failure

### Input Voltage

- 120V AC Nominal 108-132V Absolute operational limits 95-145V


### Labels:

- ETL listed for through-branch wiring and damp locations. (See trim for wet location listing).
- ETL listed to US and Canadian safety standards.





# 4" Ceramic Metal Halide Recessed Trims

<b>Catalog Number</b>	<b>Type</b>
<b>Notes</b>	

## Metal Halide Recessed Trims

	Description	Catalog #	Finishes	Lamp	Trim OD
	<b>4" Metal Halide Adjustable Baffle Trim</b> Optional W, B, SN, and MO metal trim rings available. Specify after baffle or reflector finish. 30° Lamp adjustment	<b>IVC13WW</b> <b>IVC13PWW</b> <b>IVC13BW</b> <b>IVC13PBB</b> <b>IVC13SN</b> <b>IVC13MO</b>	White Metal Baffle / White Metal Ring White Phenolic Baffle / White Metal Ring Black Baffle / White Metal Ring Black Phenolic Baffle / Black Metal Ring Satin Nickel Baffle / Satin Nickel Ring Mocha Baffle / Mocha Ring	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Adjustable Phenolic Deep Baffle</b> 30° Lamp adjustment	<b>IVC44PWW</b> <b>IVC44PBW</b> <b>IVC44PBB</b>	White Phenolic Baffle / White Metal Ring Black Phenolic Baffle / White Metal Ring Black Phenolic Baffle / White Ring	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Reflector</b> Optional W, B, SN, and MO metal trim rings available. Specify after baffle or reflector finish. 30° Lamp adjustment	<b>IVC411WW</b> <b>IVC411CW</b> <b>IVC411SDW</b> <b>IVC411BW</b>	White Reflector / White Ring Clear Reflector / White Ring Semi Diffuse Reflector / White Ring Black Reflector / White Ring	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Wall Wash With Reflector</b>	<b>IVC43WW</b> <b>IVC43CW</b>	White Reflector / White Trim Clear Reflector / White Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Adjustable Pinhole With Baffle</b> 20° Lamp adjustment	<b>IVC419BW</b> <b>IVC419WW</b> <b>IVC419B</b> <b>IVC419SN</b> <b>IVC419MO</b>	Black Baffle / White Trim White Baffle / White Trim Black Baffle / Black Trim Black baffle / Satin Nickel Trim Black baffle / Mocha Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Slot Aperture Trim</b> 45° Lamp adjustment	<b>IVC410W</b> <b>IVC410B</b> <b>IVC410SN</b> <b>IVC410MO</b>	White Trim Black trim Satin Nickel Trim Mocha Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Accent Angle Cut Reflector</b> 40° Adjustment	<b>IVC416WW</b> <b>IVC416CW</b> <b>IVC416BW</b> <b>IVC416SN</b> <b>IVC416MO</b>	White Reflector / White Ring Clear Reflector / White Ring Black Reflector / White Ring Satin Nickel Reflector / Satin Nickel Ring Mocha Reflector / Mocha Ring	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Wall Wash Reflector W/ Spread Lens</b> 40° Adjustment	<b>IVC425WW</b> <b>IVC425CW</b> <b>IVC425BW</b> <b>IVC425SN</b> <b>IVC425MO</b>	White Reflector / White Ring Clear Reflector / White Ring Black Reflector / White Ring Satin Nickel Reflector / Satin Nickel Ring Mocha Reflector / Mocha Ring	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Clear Reflector W/ Drop Glass</b>	<b>IVC40W</b> <b>IVC40SN</b>	Clear reflector / White Trim ring Clear reflector / Satin Nickel Trim ring	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>

## Compact Fluorescent Recessed Shower Trims

	Description	Catalog #	Finishes	Lamp	Trim OD
	<b>4" Metal Halide Shower Trim With Fresnel Lens</b> Gasket used to prevent moisture. NRTL wet location listed.	<b>IVS3W</b> <b>IVS3SN</b> <b>IVS3MO</b>	White Trim Satin Nickel Trim Mocha Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Shower Trim With Albalite Lens</b> Gasket used to prevent moisture. NRTL wet location listed	<b>IVS2W</b> <b>IVS2SN</b> <b>IVS2MO</b>	White Trim Satin Nickel Trim Mocha Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Shower Trim With Sand Blasted Lens</b> Gasket used to prevent moisture. NRTL wet location listed.	<b>IVS5W</b> <b>IVS5SN</b> <b>IVS5MO</b>	White Trim Satin Nickel Trim Mocha Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>
	<b>4" Metal Halide Shower Trim With Frosted Spot Lens</b> Gasket used to prevent moisture. NRTL wet location listed.	<b>IVS7W</b> <b>IVS7SN</b> <b>IVS7MO</b>	White Trim Satin Nickel Trim Mocha Trim	GE CMH Precise MR16 39W GX10	<b>5 1/4"</b>

RECESSED R-111511 P-77

Intense Lighting | 2861, E La Palma Ave. | Anaheim, CA 92806 | Phone: 1.800.961.5321 | Fax: 1.800.961.5322 | www.intenselighting.com

Note: Specifications and dimensions subject to change without notice.

