



# IVB60CF

## Dome Top Die-Cast Aluminum Bollard Compact Fluorescent


Catalog Number	Type
Notes	



42W  
MAX

DTT/TRT 4-PIN

WET  
Wet Location

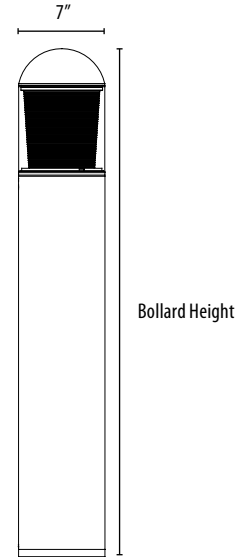


Bollard Height	
31"	31 3/8"
43"	43 3/8"

### Order Matrix | Example : IVB60CF42BZ-RF-43-L


Series	Lamp	Finish	Head Type	Height	Option
A	B	C	D	E	F
<b>A</b>	Series			<b>D</b>	Head Type
<b>IVB60CF</b>	Dome Top Die-Cast Aluminum Bollard Compact Fluorescent		<b>-RF</b>	<b>-31</b>	Adjustable Reflector
			<b>-LV</b>	<b>-43</b>	Louwer
			<b>-T3</b>		Type 3
			<b>-T5</b>		Type 5
<b>B</b>	Lamp			<b>E</b>	Height
<b>26</b>	(1) 26W DTT			<b>-31</b>	31" Bollard Height
<b>32</b>	(1) 32W TRT			<b>-43</b>	43" Bollard Height
<b>42</b>	(1) 42W TRT				
<b>C</b>	Finish			<b>F</b>	Option
<b>W</b>	White			<b>-L</b>	Lamp Included
<b>B</b>	Black				
<b>BZ</b>	Bronze				



**-RF**  
(Adjustable Reflector)



**-LV**  
(Louwer)



**-T3 / -T5**  
(Type 3 / Type 5 refractor)

### Description:

360° low-level lighting. Excellent for use on pathways, parking lots, plazas, entrance ways, parks, and landscape accents.

Four heads available for various applications: adjustable aluminum reflector, cast aluminum louvers, or I.E.S. type 3 or type 5 clear prismatic borosilicate glass refractor.

Domed tops complete this modern look, and prevent debris and moisture from accumulating on top of the bollard.

Standard finishes available in white, black and bronze. Nine stage powder coat processes for added protection. Consult factory for custom finishes.

### Lamp:

- 26W DTT 4-pin
  - 32W / 42W TRT 4-pin
- Specify: -L to include lamp

### Socket:

Q24 Universal Socket

### Features:

- Extruded aluminum housings
- Flush mounting base
- Vandal resistant screws
- Nine stage powdercoat process
- Clear polycarbonate lens
- Internal gear/ballast tray for easy maintenance

### Electrical:

120/277V IntelliVolt® electronic ballast with inherent thermal protection. High power factor 0.97. Sound rated A. Class P. Minimum ballast temp -18°C / 0°F. Harmonic distortion < 10%. Outdoor type 1.

### Optics:

Available with adjustable reflector, louwer, type 3 glass, and type 5 glass.

### Specify:

- RF (adjustable reflector)
- LV (cast aluminum louwer)
- T3 (type 3 prismatic glass refractor)
- T5 (type 5 prismatic glass refractor)

### Installation:

Includes bracket and three 8" anchor bolts for use in concrete. Consult factory for alternative anchor bolt lengths.

### Listing:

NRTL listed for wet locations. NRTL listed to US and Canadian standards.  
- IP Rating (IP65)

