



# IVB70CF

Flat Top Die-Cast Aluminum Bollard Compact Fluorescent

Catalog Number	Type
Notes	




42W  
MAX

DTT/TRT 4-PIN


WET  
Wet Location

Bollard Height	
29"	29 3/8"
41"	41 3/8"

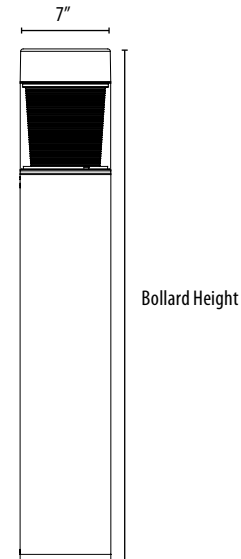


**Order Matrix** | Example : IVB70CF42BZ-RF-41-L


Series	Lamp	Finish	Head Type	Height	Option
A	B	C	D	E	F
<b>A</b>	Series			<b>D</b>	Head Type
<b>IVB70CF</b>	Flat Top Die-Cast Aluminum Bollard Compact Fluorescent		<b>-RF</b> <b>-LV</b> <b>-T3</b> <b>-T5</b>		Adjustable Reflector Louver Type 3 Type 5
<b>B</b>	Lamp			<b>E</b>	Height
<b>26</b>	(1) 26W DTT			<b>-29</b>	29" Bollard Height
<b>32</b>	(1) 32W TRT			<b>-41</b>	41" Bollard Height
<b>C</b>	Finish			<b>F</b>	Option
<b>W</b>	White			<b>-L</b>	Lamp Included
<b>B</b>	Black				
<b>BZ</b>	Bronze				



**-RF**  
(Adjustable Reflector)



**-LV**  
(Louver)



**-T3 / -T5**  
(Type 3/ Type 5 refractor)

**Description:**

360° low-level lighting. Excellent for use on pathways, parking lots, plazas, entrance ways, parks, and landscape accents.

Four heads available for various applications: adjustable aluminum reflector, cast aluminum louvers, or I.E.S. type 3 or type 5 clear prismatic borosilicate glass refractor.

Standard finishes available in white, black and bronze. Nine stage powder coat processes for added protection. Consult factory for custom finishes.

**Lamp:**

- 26W DTT 4-pin
- 32W / 42W TRT 4-pin
- Specify: -L to include lamp

**Socket:**

Q24 Universal Socket

**Features:**

- Extruded aluminum housings
- Flush mounting base
- Vandal resistant screws
- Nine stage powdercoat process
- Clear polycarbonate lenses
- Internal gear/ballast tray for easy maintenance

**Electrical:**

120/277V IntelliVolt® electronic ballast with inherent thermal protection. High power factor 0.97. Sound rated A. Class P. Minimum ballast temp -18°C / 0°F. Harmonic distortion < 10%. Outdoor type 1.

**Optics:**

Available with adjustable reflector, louver, type 3 glass, and type 5 glass.

Specify:

- RF (adjustable reflector)
- LV (cast aluminum louver)
- T3 (type 3 prismatic glass refractor)
- T5 (type 5 prismatic glass refractor)

**Installation:**

Includes bracket and three 8" anchor bolts for use in concrete. Consult factory for alternative anchor bolt lengths.

**Listing:**

NRTL listed for wet locations. NRTL listed to US and Canadian standards.

- IP Rating (IP65)

