# **Instruction Sheet**

For use with IQ & IQN


### **IMPORTANT SAFETY INSTRUCTIONS**


- Read all installation instructions before installing. It is important to save these instructions.
- Turn off power at circuit breaker before attempting to install or perform maintenance on the fixtures.
- Wear rubber-soled shoes and work on a sturdy wooden ladder
- The product must be installed in a manner consistent with the intended use and in compliance with the national electrical codes and local codes.
- Ground fixture to avoid potential electrical shock.
- Do not install any fixture assembly closer than 6 inches from any curtain, or similiar combustible material.
- WARNING: Lamp may be hot, allow lamp to cool before attempting to replace lamp (Do not use bar hand to replace lamp in fixture)
- WARNING: RISK OF FIRE. Minimum of 90°C supply conductors. Consult a qualified electrician before installation.

#### REMOVING FIXTURE FROM TRACK

- 1. Turn power off.
- 2. Pull down the latch on the adapter and twist the adapter 1/4 turn.
- 3. Remove the fixture from the track.

#### VERTICAL ADJUSTMENT AND LOCKING

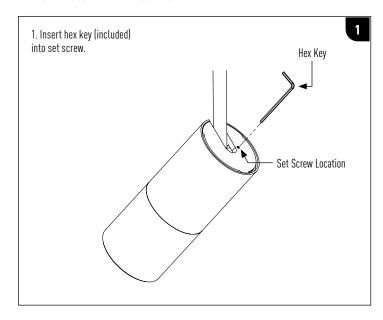


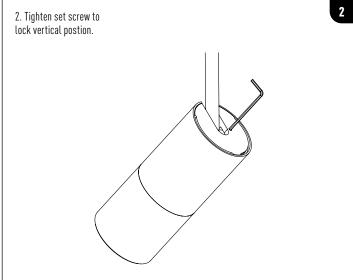

## **OPTIC & MEDIA ACCESSORY**

#### OPTIC REPLACEMENT

- 1. To add or remove an optic, unscrew the cap counterclockwise and separate from housing
- 2. Remove retainer clip buy squeezing the ends together and remove the optic
- **3.** Replace optic back into cap and install retainer clip
- **4.** Make sure retainer clip sits into the retainer channel to keep optic secure
- 5. Once the optic is secured in cap, hand tighten the cap assembly clockwise to secure to IQN housing



# MEDIA ACCESSORY / HOLDER INSTALLATION

- To add or remove media accessory and or holder, unscrew the Insert counterclockwise and separate cap from the insert
- 2. To instal (1) media accessory; place media into accessory holder insert and install the unit into the cap and hand tighten the the insert into cap assembly clockwise to secure

