

# MR16-MXDSTR

## 3.5" MX MR16 Square Lensed Downlight - Wet Location

<b>JOB NAME</b>		<b>CATALOG NUMBER</b>	
<b>NOTES</b>		<b>TYPE</b>	

Catalog Number	Lamp Type	Socket Type	Maximum Wattage
<b>MXT-STRx302-GU53</b>	12V MR16	GU5.3	15W LED / 20W Halogen
<b>MXT-STRx302-GU10</b>	120V MR16	GU10	15W LED / 20W Halogen

### LAMP (ORDERED SEPARATELY)

- 12V MR16 GU5.3 LED 15W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 1.83" (46.4mm)
- 12V MR16 GU5.3 Halogen 20W max. (must use MR16 with front cover glass) - lamp diameter up to 1.97" and MOL of 1.83"
- 120V MR16 GU10 LED 15W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 2.18" (55.3mm)
- 120V MR16 GU10 Halogen 20W max. - accommodates lamp diameter up to 1.97" (50.1mm) and MOL of 2.18" (55.3mm)

### ELECTRICAL SYSTEM

- Power factor >.9, 50/60Hz
- Multiple electronic transformers available, dimming on 120V only
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

### TRANSFORMERS (Check LED compatibility with lamp manufacturer):

- NT - GU10 without transformer with 120V input (20W max.)
- T1 - Hatch RS12-15(X)-LED 120V input/12V output 15W max., no minimum load
- T2 - Hatch RS12-60(X) 120V input/12V output 20W max., no minimum load
- T3 - Hatch RS12-80-277(X) 277V input/12V output 20W max., minimum load 10W (not recommended for LED)

### HOUSING

Heavy duty black powder coated 18 gauge steel frame. Standard plaster frame accommodates 5/8" ceiling thickness. Extended collar options available for ceilings up to 1" or 2" thick, must specify.

### TRIM SPECIFICATION






High quality trims are die-cast using A380 aluminum with durable powder coat available in multiple finishes. Architectural, discrete self flange or painted white flange options available. Trim is available with solite, clear tempered or frosted lens, must specify. Trims available in 1 1/2" regress for greater visual comfort or 1/2" regress for consistent look throughout space.

### INSTALLATION

Housing types include IC Air-Tight or Non-IC Rated (must specify). Non-IC rated housings must be kept at a minimum of 3" away from insulation. Butterfly brackets are compatible with C-channel, adjustable bar hangers (14"-25") and EMT. C-channel is recommended for T-bar ceilings. Bar hangers must be ordered separately. Consult lamp manufacturer for maximum ambient temperature.

### LISTINGS

- ETL Listed to US and Canadian standards for wet locations
- (-AIC Only) Air Tight Certified ASTM E283
- (-AIC Only) ETL listed for direct contact w/insulation



Housing dimensions are on Page 2

### Housing Part Number (Example: MR16-MXDSTR-ICT1)

Housing	Installation Type	Ceiling Thickness	Transformer	Options
<b>MR16-MXDSTR</b>	<b>-NC</b> (Non-IC)	blank (5/8")	<b>NT</b> (GU10 120V No Transformer)	<b>I100</b> (C-Channel Bar Hangers)
	<b>-IC</b> (Air-Tight IC)	<b>EC1</b> (1")	<b>T1</b> (120V/12V RS12-15X-LED)	<b>I200</b> (Flat Bar Hangers)
		<b>EC2</b> (2")	<b>T2</b> (120V/12V RS12-60X)	<b>I400</b> (Wood Joist Bar Hangers)
			<b>T3</b> (277V/12V RS12-80X)	

### Trim Part Number (Example: MXT-STRR302W-SF-GU53-CR)


Trim	Finish	Base Type	Lens
<b>MXT-STRD302</b> (1 1/2" Regress)	<b>B-SF</b> (Black / Self Flanged)	<b>-GU53</b> (12V MR16)	<b>-SL</b> (Solite)
<b>MXT-STRR302</b> (1/2" Regress)	<b>B-SFW</b> (Black / Self Flanged White)	<b>-GU10</b> (120V MR16)	<b>-CR</b> (Clear Tempered)
	<b>W-SF</b> (White / Self Flanged)		<b>-FR</b> (Frosted)
	<b>SN-SF</b> (Satin Nickel / Self Flanged)		
	<b>SN-SFW</b> (Satin Nickel / Self Flanged White)		
	<b>AB-SF</b> (Antique Bronze / Self Flanged)		
	<b>AB-SFW</b> (Antique Bronze / Self Flanged White)		
	<b>WH-SF</b> (Wheat / Self Flanged)		
	<b>WH-SFW</b> (Wheat / Self Flanged White)		

# MR16-MXDSTR

3.5" MX MR16 Square Lensed Downlight - Wet Location

JOB NAME	CATALOG NUMBER
NOTES	TYPE

## NON-IC & AIR TIGHT IC DIMENSIONS

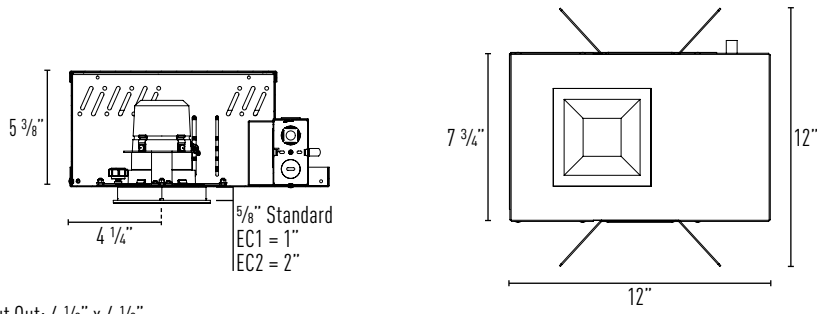

Ceiling Cut Out: 4 1/8" x 4 1/8"