

# MXRG2ARTR

3.5" MX G2 LED Lensed Pinhole with Remodel Housing - Wet Location

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## ELECTRICAL DATA

LED Light Engine	System Wattage *	CCT / CRI	Delivered Lumens **	Lumens Per Watt
L0	10W	3000K / 82 CRI	800lm	80
L1	16W	3000K / 82 CRI	1100lm	69
L2	20W	3000K / 82 CRI	1350lm	68
L3	26W	3000K / 82 CRI	1500lm	58

\*System Wattage include driver and LED Module consumption. \*\*Delivered lumens will vary depending on trim, CCT, CRI, optic and ceiling thickness

## FEATURES

- Multiple architectural trim options
- High center beam spot up to 21,600 CBCP
- Dedicated 9° with field changeable 12°, 24°, 36° & 50° optics

## LED LIGHT ENGINE

- 92 CRI & 82 CRI in 2700K, 3000K, 3500K or 4100K with 2SDCM binning
- >50,000 hours L70 (rated life at 70% output)

## ELECTRICAL SYSTEM

- (Non-IC) Dedicated voltage options of 120V or 277V. Must be specified in catalog code.
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

## DIMMING

- 0-10V Dimming 1%
- Forward/reverse dimming 1% (120V only)
- EldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- DMX512 RDM 0.1%

## HOUSING

High quality die-casted collar with high strength stainless steel swing out lugs. Driver swivels 90° to accommodate tight spaces.

## TRIM SPECIFICATION


Aiming with locking 35° vertical and 360° horizontal adjustment. High quality trims are die-cast using A380 aluminum with durable powder coat available in multiple finishes, black interior standard. Trim is available with solite, clear tempered or frosted lens, must specify.

## INSTALLATION


Housing installs from below the ceiling. Swing out lugs allow for installation in ceilings between 5/16" and 3/4". Max. ambient temperature: 95°F (35°C). Housing is Non-IC rated, must be kept at a minimum of 3" away from insulation.

## LISTING / WARRANTY

- 5-Year Intense LED Limited Warranty
- ETL listed to US and Canadian standards for wet locations



MXTG2-RFRR308  
(1/2" Flat Mount with Lens)



Housing dimensions are on Page 2

## Available Trim Finishes



## Housing Part Number (Example: MXRG2ARTR-NCL1)

Housing	Installation Type	Wattage	Dimming	Voltage
MXRG2ARTR	-NC (Non-IC)	L0 (10W)	blank (Non-Dimming)	blank (Non-IC: 120V
		L1 (16W)	DELV <sup>1</sup> (Phase Dimming)	-IC/-CP: 120V/277V)
		L2 (20W)	D101 (0-10V Dimming 1%)	27 (277V Non-IC Only,
		L3 (26W)	ED10V1 <sup>2</sup> (eldoLED 0-10V 1%)	for -IC/-CP housing
			ED10V01 <sup>2</sup> (eldoLED 0-10V 0.1%)	options use blank)
			LUT <sup>3</sup> (Lutron® LDE1 EcoSystem 1%)	
	DMXR <sup>4</sup> (DMX512 RDM 0.1%)			

## Trim Part Number (Example: MXTG2-RFRR308WL13024-SL)

Trim	Finish	Wattage	CCT / CRI	Optic	Lens
MXTG2-RFRR308 (1/2" Flat Mount)	W (White)	L0 (10W)	27 (2700K / 82 CRI)	09 <sup>5</sup> (9° Narrow Spot)	-SL (Solite)
	B (Black)	L1 (16W)	279 (2700K / 92 CRI)	12 (12° Spot)	-CR (Clear Tempered)
		L2 (20W)	30 (3000K / 82 CRI)	24 (24° Narrow Flood)	-FR (Frosted)
	AB (Antique Bronze)	L3 (26W)	309 (3000K / 92 CRI)	36 (36° Flood)	
				35 (3500K / 82 CRI)	50 (50° Wide Flood)
			359 (3500K / 92 CRI)		
			41 (4100K / 82 CRI)		
			419 (4100K / 92 CRI)		

## Notes:

- Available in 120V only
- Not Available in L3
- Not Available in L2 & L3
- DMX512 RDM not available in L0 & L1
- 9° NS available in 279 with L0 or L1 Only

MX ADJUSTABLE REMODEL L/M-109/23 P-19

INTENSE LIGHTING | 725 Landwehr Road, Northbrook, IL 60062 | tel 714 630-9877 | fax 847 559-5505  
For Intense Lighting's limited product warranty, go to [www.intenselighting.com](http://www.intenselighting.com). For a printed copy of the warranty, you may call 800 961-5321.  
© 2023 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.


intense® | a LEVITON® company

# MXRG2ARTR

3.5" MX G2 LED Lensed Pinhole with Remodel Housing - Wet Location


JOB NAME	CATALOG NUMBER
NOTES	TYPE

**DRIVER:** Non-Dimming / DELV / D10

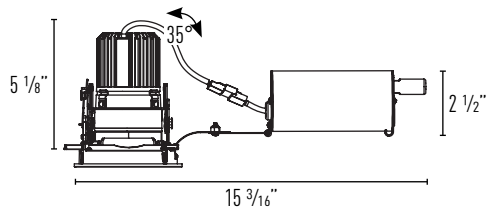

Ceiling Cut Out: 4 1/8"  
Minimum Ceiling Thickness: 5/16"  
Maximum Ceiling Thickness: 3/4"

**DRIVER:** eldoLED / Lutron / DMX

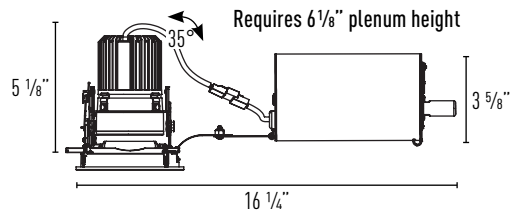


Ceiling Cut Out: 4 1/8"  
Minimum Ceiling Thickness: 5/16"  
Maximum Ceiling Thickness: 3/4"

## OPTICS REPLACEMENT

1. Rotate release cap by turning counter clockwise.
2. Install accessories into accessory holder and replace accessory holder's retaining clip.
3. Place accessory holder and accessory flush against optic and replace release cap.

### Optics

- IP-OP4712 (12° Spot)
- IP-OP4724 (24° Narrow Flood)
- IP-OP4736 (36° Flood)
- IP-OP4750 (50° Wide Flood)

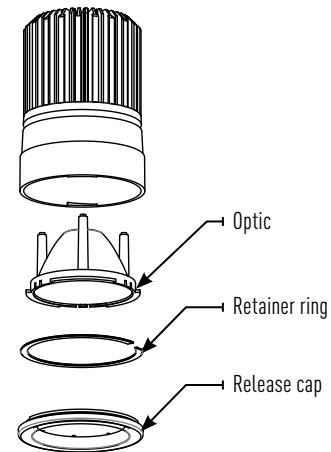

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MXTG2-RTRR308L0-CR

Report #: ILL-01262016-38 (12)  
 ILL-02082016-11 (24)  
 ILL-01262016-44 (36)  
 ILL-01262016-47 (50)

### MXTG2-RTRR308

Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)

### MXTG2-RFRR308

Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)


### CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

### LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)

### 12° Spot (12)




Watts: 10  
 Lumens: 689  
 LPW: 69  
 CCT: 3000K

### 24° Narrow Flood (24)




Watts: 10  
 Lumens: 793  
 LPW: 79  
 CCT: 3000K

### 36° Flood (36)



Watts: 10  
 Lumens: 805  
 LPW: 81  
 CCT: 3000K

### 50° Wide Flood (50)



Watts: 10  
 Lumens: 642  
 LPW: 64  
 CCT: 3000K

### Candelas at Nadir

Degree	Candela
0°	12041
5°	7036
15°	498
25°	47
35°	8
45°	2

### Candelas at Nadir

Degree	Candela
0°	5177
5°	4646
15°	1193
25°	88
35°	8
45°	3

### Candelas at Nadir

Degree	Candela
0°	2576
5°	2608
15°	1477
25°	298
35°	30
45°	2

### Candelas at Nadir




Degree	Candela
0°	991
5°	1047
15°	921
25°	446
35°	118
45°	7

### APPLICATION DATA:

**W** and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

**W** Beam width  
**L** Beam length  
**C** Distance to center of beam  
**D** Distance  
**FC** Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MXTG2-RTRR308L0-CR</b> <b>3000K</b> <b>12° Spot</b>	6'	334	1.2	1.2	6'	4	181	1.74	1.38	3'	4	349	1.13	1.9
	8'	188	1.6	1.6	8'	5	93.8	2.54	1.84	4'	6	181	1.38	2.59
	10'	120	2	2	10'	7	66.2	3	2.54	5'	7	129	1.63	3.04
	12'	83.6	2.4	2.4	12'	8	45.2	3.58	3	6'	8	87.2	2.07	3.7
<b>MXTG2-RTRR308L0-CR</b> <b>3000K</b> <b>24° Narrow Flood</b>	6'	144	2.3	2.3	6'	4	82.7	3.17	2.77	3'	4	165	1.79	3.11
	8'	80.9	3.1	3.1	8'	5	48	4.08	3.45	4'	5	94	2.5	4.02
	10'	51.8	3.9	3.9	10'	6	30.8	5.09	4.37	5'	6	59.1	3.16	5.05
	12'	35.9	4.6	4.6	12'	7	21.1	6.17	5.3	6'	8	41.1	3.71	6.02
<b>MXTG2-RTRR308L0-CR</b> <b>3000K</b> <b>36° Flood</b>	6'	71.6	3.4	3.4	6'	3	47.4	4.06	3.57	3'	3	86.8	2.74	3.96
	8'	40.3	4.5	4.5	8'	4	26.7	5.38	4.83	4'	5	50.1	3.42	5.18
	10'	25.8	5.7	5.7	10'	5	17.1	6.68	5.97	5'	6	32.9	4.34	6.37
	12'	17.9	6.8	6.8	12'	6	11.9	8.05	7.2	6'	7	23.1	5.06	7.55
<b>MXTG2-RTRR308L0-CR</b> <b>3000K</b> <b>50° Wide Flood</b>	6'	27.5	5.1	5.1	6'	3	20.8	5.02	4.91	3'	3	40.5	3.35	4.38
	8'	15.5	6.7	6.7	8'	3	12	6.5	6.49	4'	4	22.8	4.58	5.78
	10'	9.9	8.4	8.4	10'	4	7.8	8.06	8.1	5'	5	14.6	5.75	7.18
	12'	6.9	10.1	10.1	12'	5	5.4	9.64	9.67	6'	6	10.1	6.89	8.62

<b>JOB NAME</b>		<b>CATALOG NUMBER</b>	
<b>NOTES</b>		<b>TYPE</b>	

## MXTG2-RTRR308L1-CR

Report #: ILL-01262016-14 (12)  
 ILL-02082016-09 (24)  
 ILL-01262016-20 (36)  
 ILL-01262016-23 (50)

### MXTG2-RTRR308

Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)

### MXTG2-RFRR308


Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)

### CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

### LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)



Watts: 15.6  
 Lumens: 946  
 LPW: 61  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	16801
5°	9647
15°	682
25°	65
35°	12
45°	3



Watts: 15.6  
 Lumens: 1107  
 LPW: 71  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	7216
5°	6483
15°	1664
25°	123
35°	11
45°	4



Watts: 15.6  
 Lumens: 1144  
 LPW: 73  
 CCT: 3000K

### Candelas at Nadir

Degree	Candela
0°	3064
5°	3052
15°	2016
25°	540
35°	76
45°	3



Watts: 15.6  
 Lumens: 898  
 LPW: 58  
 CCT: 3000K

### Candelas at Nadir




Degree	Candela
0°	1441
5°	1519
15°	1307
25°	613
35°	158
45°	9

### APPLICATION DATA:

**W** and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

**W** Beam width  
**L** Beam length  
**C** Distance to center of beam  
**D** Distance  
**FC** Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MXTG2-RTRR308L1-CR</b> <b>3000K</b> <b>12° Spot</b>	6'	467	1.2	1.2	6'	4	252	1.72	1.37	3'	4	484	1.13	1.88
	8'	263	1.6	1.6	8'	5	130	2.51	1.82	4'	6	252	1.37	2.58
	10'	168	2	2	10'	7	92.4	2.97	2.5	5'	7	180	1.62	2.99
	12'	117	2.4	2.4	12'	8	62.9	3.54	2.97	6'	8	121	2.04	3.69
<b>MXTG2-RTRR308L1-CR</b> <b>3000K</b> <b>24° Narrow Flood</b>	6'	200	2.3	2.3	6'	4	115	3.17	2.78	3'	4	229	1.79	3.11
	8'	113	3.1	3.1	8'	5	66.9	4.09	3.44	4'	5	131	2.5	4.03
	10'	72.2	3.9	3.9	10'	6	42.9	5.09	4.37	5'	6	82.4	3.16	5.04
	12'	50.1	4.6	4.6	12'	8	29.4	6.18	5.31	6'	8	57.3	3.72	6.04
<b>MXTG2-RTRR308L1-CR</b> <b>3000K</b> <b>36° Flood</b>	6'	85.1	3.8	3.8	6'	3	57.5	4.31	3.86	3'	3	109	2.87	4.01
	8'	47.9	5.1	5.1	8'	4	32.3	5.69	5.22	4'	4	61.1	3.66	5.42
	10'	30.6	6.3	6.3	10'	5	20.7	7.13	6.51	5'	5	39.1	4.72	6.73
	12'	21.3	7.6	7.6	12'	6	14.4	8.55	7.77	6'	7	27.2	5.58	8.04
<b>MXTG2-RTRR308L1-CR</b> <b>3000K</b> <b>50° Wide Flood</b>	6'	40	4.9	4.9	6'	3	30	4.95	4.8	3'	3	58.4	3.3	4.37
	8'	22.5	6.6	6.6	8'	3	17.1	6.84	6.44	4'	4	32.8	4.49	5.73
	10'	14.4	8.2	8.2	10'	4	11.1	6.54	7.98	5'	5	21	5.63	7.17
	12'	10	9.9	9.9	12'	5	7.7	9.54	9.49	6'	6	14.6	6.75	8.59

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MXTG2-RTRR308L2-CR

Report #: ILL-01262016-26 (12)  
 ILL-02082016-06 (24)  
 ILL-01262016-32 (36)  
 ILL-02082016-05 (50)

### MXTG2-RTRR308

Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)

### MXTG2-RFRR308


Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)

### CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

### LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)



Watts: 20.4  
 Lumens: 1164  
 LPW: 57  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	18893
5°	12317
15°	737
25°	93
35°	17
45°	4



Watts: 20.8  
 Lumens: 1354  
 LPW: 65  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	8971
5°	8191
15°	2027
25°	127
35°	14
45°	5



Watts: 20.4  
 Lumens: 1377  
 LPW: 68  
 CCT: 3000K

### Candelas at Nadir

Degree	Candela
0°	3694
5°	3642
15°	2430
25°	646
35°	95
45°	4



Watts: 20.8  
 Lumens: 1095  
 LPW: 53  
 CCT: 3000K

### Candelas at Nadir




Degree	Candela
0°	1440
5°	1522
15°	1476
25°	802
35°	244
45°	16

### APPLICATION DATA:

**W** and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

**W** Beam width  
**L** Beam length  
**C** Distance to center of beam  
**D** Distance  
**FC** Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MXTG2-RTRR308L2-CR</b> 3000K 12° Spot	6'	525	1.3	1.3	6'	4	300	1.84	1.41	3'	4	595	1.11	1.93
	8'	295	1.7	1.7	8'	5	166	2.51	1.81	4'	5	303	1.4	2.66
	10'	189	2.2	2.2	10'	7	104	3.26	2.79	5'	7	208	1.73	3.22
	12'	131	2.6	2.6	12'	8	75	3.75	3.14	6'	8	149	2.11	3.77
<b>MXTG2-RTRR308L2-CR</b> 3000K 24° Narrow Flood	6'	249	2.3	2.3	6'	4	144	3.15	2.75	3'	4	288	1.78	3.09
	8'	140	3.1	3.1	8'	5	84.3	4.06	3.44	4'	5	165	2.48	3.98
	10'	89.7	3.9	3.9	10'	6	54.2	5.05	4.33	5'	6	104	3.14	4.99
	12'	62.3	4.6	4.6	12'	7	37.1	6.1	5.26	6'	8	71.9	3.7	6.01
<b>MXTG2-RTRR308L2-CR</b> 3000K 36° Flood	6'	103	3.8	3.8	6'	3	68.9	4.31	3.88	3'	3	130	2.86	4
	8'	57.7	5.1	5.1	8'	4	38.7	5.69	5.25	4'	4	73.2	3.69	5.43
	10'	36.9	6.4	6.4	10'	5	24.8	7.15	6.54	5'	5	46.8	4.74	6.74
	12'	25.7	7.7	7.7	12'	6	17.2	8.55	7.81	6'	6	32.5	5.62	8.06
<b>MXTG2-RTRR308L2-CR</b> 3000K 50° Wide Flood	6'	40	5.2	5.2	6'	2	33.5	4.89	5.08	3'	3	61.3	3.63	4.44
	8'	22.5	6.9	6.9	8'	3	19.1	6.35	6.75	4'	4	34.5	4.91	5.84
	10'	14.4	8.6	8.6	10'	4	12.2	7.96	8.53	5'	5	22.1	6.27	7.34
	12'	10	10.4	10.4	12'	5	8.4	9.64	10.03	6'	5	15.4	7.4	8.73

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MXTG2-RTRR308L3-CR

Report #: ILL-01262016-11 (12)  
 ILL-02082016-02 (24)  
 ILL-01262016-02 (36)  
 ILL-02082016-01 (50)

### MXTG2-RTRR308

Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)

### MXTG2-RFRR308

Ceiling Thickness Multipliers:  
 5/8" Thickness (x 1.00)  
 1" Thickness (x 0.86)  
 2" Thickness (x 0.67)


### CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.93)	(x 0.76)
3000K	(x 1.00)	(x 0.87)
3500K	(x 1.00)	(x 0.87)
4100K	(x 1.00)	(x 0.87)

### LENS MULTIPLIERS:


Solite	(x 0.92)
Clear	(x 1.00)
Frosted	(x 0.92)

### 12° Spot (12)




Watts: 26.3  
 Lumens: 1342  
 LPW: 51  
 CCT: 3000K

### 24° Narrow Flood (24)




Watts: 26.3  
 Lumens: 1540  
 LPW: 59  
 CCT: 3000K

### 36° Flood (36)



Watts: 26.4  
 Lumens: 1546  
 LPW: 59  
 CCT: 3000K

### 50° Wide Flood (50)



Watts: 26.3  
 Lumens: 1143  
 LPW: 43  
 CCT: 3000K

### Candelas at Nadir

Degree	Candela
0°	21617
5°	14174
15°	798
25°	98
35°	20
45°	5

### Candelas at Nadir

Degree	Candela
0°	10193
5°	9303
15°	2304
25°	144
35°	16
45°	5

### Candelas at Nadir

Degree	Candela
0°	5172
5°	5082
15°	2760
25°	563
35°	75
45°	5

### Candelas at Nadir




Degree	Candela
0°	1599
5°	1557
15°	1411
25°	836
35°	306
45°	27

### APPLICATION DATA:

**W** and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

**W** Beam width  
**L** Beam length  
**C** Distance to center of beam  
**D** Distance  
**FC** Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL				35° VERTICAL					
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MXTG2-RTRR308L3-CR</b> <b>3000K</b> <b>12° Spot</b>	6'	600	1.3	1.3	6'	4	341	1.86	1.43	3'	4	666	1.12	1.95
	8'	338	1.8	1.8	8'	5	189	2.54	1.89	4'	5	343	1.43	2.73
	10'	216	2.2	2.2	10'	7	119	3.25	2.77	5'	7	237	1.76	3.25
	12'	150	2.6	2.6	12'	8	85.2	3.78	3.16	6'	8	167	2.22	3.85
<b>MXTG2-RTRR308L3-CR</b> <b>3000K</b> <b>24° Narrow Flood</b>	6'	283	2.3	2.3	6'	4	164	3.17	2.76	3'	4	327	1.78	3.09
	8'	159	3.1	3.1	8'	5	95.7	4.05	3.44	4'	5	188	2.48	3.98
	10'	102	3.9	3.9	10'	6	61.5	5.05	4.32	5'	6	118	3.14	4.99
	12'	70.8	4.6	4.6	12'	7	42.2	6.11	5.27	6'	8	81.6	3.7	6.01
<b>MXTG2-RTRR308L3-CR</b> <b>3000K</b> <b>36° Flood</b>	6'	144	3.3	3.3	6'	3	91.3	4.02	3.52	3'	4	166	2.72	3.97
	8'	80.8	4.4	4.4	8'	4	51.4	5.34	4.77	4'	5	98.2	3.34	5.09
	10'	51.7	5.5	5.5	10'	5	32.9	6.63	5.87	5'	6	64.1	4.22	6.25
	12'	35.9	6.6	6.6	12'	6	22.8	8	7.09	6'	7	44.8	4.97	7.46
<b>MXTG2-RTRR308L3-CR</b> <b>3000K</b> <b>50° Wide Flood</b>	6'	44.4	5.7	5.7	6'	2	32.1	5.16	5.22	3'	3	59.3	3.73	4.54
	8'	25	7.6	7.6	8'	3	18.3	6.73	6.93	4'	4	33.4	4.98	5.97
	10'	16	9.6	9.6	10'	4	11.7	8.43	8.74	5'	5	21.4	6.34	7.49
	12'	11.1	11.5	11.5	12'	5	8.1	10.15	10.57	6'	6	14.8	7.58	8.97