




ILED80B

Outdoor Die-Cast Step Light LED

Catalog Number	Type
Notes	

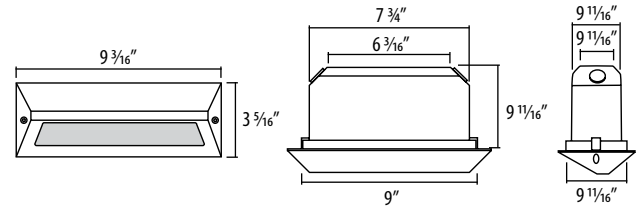

-AG: Angled Louver



-G: Louver



-OP: Half Moon

Step Light Matrix | Example : ILED80BW-OP

Series	LED Color	Voltage	Face Plate
A	B	C	D
A Series		C Voltage	
ILED80B Black Die-Cast Step Light Compact Fluorescent		Blank 120V -27 277V	
B LED Color		D Face Plate	
R Red G Green B Blue A Amber W White 6000K NW White 3500K		-G Louver -AG Angled Louver -OP Half Moon	

Description:

The 80B series step light offers a black die-cast aluminum wall mount step light with 3 optional faceplates. The fixture is rated for use outdoors in concrete or blocks walls and offers low profile, safe illumination.

Features:

- Thermal protection integral to ballast
- Heavy duty, low profile aesthetic louver trim included

Lamp:

Compact Fluorescent: 13/18W DTT 4-Pin
LED: 2W

Face Plate:

The faceplate is available in 3 versions, standard louver, angled louver, and half moon, each trim is constructed from heavy duty .040 die cast aluminum. Faceplates are available in black.

Housing:

The housing is constructed of die-cast aluminum with less than .3% copper to prevent corrosion. The housing comes standard with two 1/2" threaded knockouts to accept the power feed. Housing comes standard with captive black oxide stainless steel fasteners and a molded silicone gasket.

Mounting:

Recessed wall mounted step light has bracket plates on the front of the housing allowing the housing to be secured to joists. Optional hanger bars can be ordered for installation. Fixture is rated for indoor and outdoor applications, insulation must be kept 3" away from all sides of the fixture.

Listing:

NRTL listed for wet locations. NRTL listed to US and Canadian standards.